

MURATA MACHINERY, LTD.

TEXTILE MACHINERY DIVISION

Green-Bldg, 2-6-26, Kitahama, Chuo-ku, Osaka, 541-0041, JAPAN
TEL: +81-(0)6-6202-1385 FAX: +81-(0)6-6202-3096
<https://www.muratec.net>

INQUIRIES REGARDING OPERATIONS

MURATA MACHINERY, LTD.
TEXTILE MACHINERY DIVISION
TECHNICAL SERVICE DEPARTMENT
136, Takeda-Mukaishiro-cho, Fushimi-ku, Kyoto, 612-8686, JAPAN
TEL: +81-(0)75-672-8230 FAX: +81-(0)75-672-8304

GLOBAL SALES & SERVICE NETWORK

MURATA MACHINERY USA INC.
2120 Queen City Drive, P.O.Box 667609,
Charlotte, N.C. 28208, U.S.A.
TEL: +1-704-394-8331 FAX: +1-704-392-6541
<https://www.muratec-usa.com>

MURATA MACHINERY MEXICO S. DE R. L. DE C. V.
Durango 81 Int. 508, Colonia: Roma Norte.,
CP. 06700 Delegacion: Cuauhtemoc Ciudad
de México, CDMX, MEXICO
TEL: +52-(0)55-52073064

MURATA DO BRASIL, LTDA.
Estrada de Santa Isabel, 3383-KM 38,5,
Itaquaquecetuba-SP, CEP 08599-000, BRASIL
TEL: +55-(0)11-4648-6222 FAX: +55-(0)11-4648-6737

MURATA MACHINERY EUROPE GMBH
Hanns-Martin-Schleyer-Strasse 3, D-47877,
Willich, GERMANY
TEL: +49-(0)2154-914-0 FAX: +49-(0)2154-914-188

**MURATA MACHINERY EUROPE GMBH
ISTANBUL BRANCH**
Cavusoglu Mahallesi Cobanyildizi caddesi No:18,
34873, Kartal / Istanbul, TURKEY
TEL: +90-(0)216-374-5698 FAX: +90-(0)216-374-0614

**MURATA MACHINERY INDIA PRIVATE LTD.
NEW DELHI OFFICE (REGISTERED OFFICE)**
1010, Hemkunt Tower, 98, Nehru Place,
New Delhi, 110019, INDIA
TEL: +91-11-2628-0046/47 FAX: +91-11-2628-0048

**MURATA MACHINERY INDIA PRIVATE LTD.
MUMBAI OFFICE**
Unit No.401, 4th Floor, Madhava Building,
Bandra Kurla Complex, Bandra East,
Mumbai, 400051, INDIA
TEL: +91-22-2659-0275-77 FAX: +91-22-2659-0280

**MURATA MACHINERY INDIA PRIVATE LTD.
COIMBATORE OFFICE**
7-A1/A2, Avinashi Road, Thottipalayam Pirivu,
Civil Aerodrome(P.O) Coimbatore-641014,
Tamilnadu, INDIA
TEL: +91-422-450-4184/85 FAX: +91-422-450-4186

MURATA MACHINERY BANGLADESH LTD.
Paradise tower, 5th Floor, Plot# 11, Sector# 3,
Uttara, Dhaka, Bangladesh
TEL: +880-(0)2-48955001 FAX: +880-(0)2-48955002

MURATA (THAILAND) CO., LTD.
898/43-44 SV CITY TOWER 2, 25th Floor, Rama 3 Road
Bangpongpan, Yannawa, Bangkok 10120, THAILAND
TEL: +66-(0)2294-7734-40 FAX: +66-(0)2294-7732

PT.MURATA MACHINERY INDONESIA
Ruko Gyan Plaza D-4, Jl. Terusan Pasirkoja Blok 8,
Bandung, 40222,INDONESIA
TEL: +62-(0)22-604-6633 FAX: +62-(0)22-604-6612

MURATA MACHINERY VIETNAM CO., LTD.
58 Nguyen Quy Duc street, An Phu Ward, District 2,
Ho Chi Minh City, VIETNAM
TEL: +84-(0)28-6281-0601 FAX: +84-(0)28-6281-0860

INQUIRIES REGARDING PARTS

MURATA PARTS SALES, LTD.
136, Takeda-Mukaishiro-cho, Fushimi-ku, Kyoto, 612-8686, JAPAN
TEL: +81-(0)75-672-8371 FAX: +81-(0)75-671-0789
<https://www.muratec.net/tm/support>

(LIAISON OPERATIONS)

MURATA MACHINERY, LTD.
CAIRO LIAISON OFFICE
APT 604, 6th Floor, 8, El Mansour Mohamed Street,
Zamalek, Cairo, A.R.EGYPT
TEL: +20-(0)2-7355168 FAX: +20-(0)2-7355168

(AUTHORIZED SERVICE AGENCIES)

SPINTEX (PRIVATE) LTD.
C-92, KDA Scheme No.1, Karachi, PAKISTAN
TEL: +92-(0)21-34523729,34523739 FAX: +92-(0)21-34523727

M.B. DI MASSIMO BARBERIS
Via Arduino Giuseppe 4, 13853 Lessona,(BI), ITALY
TEL: +39-015-981903 Fax: +39-015-981903


ANTONIO LEITAO UNIPessoal LDA.
Rua do Padrão N° 356 4150-558 Porto, PORTUGAL
TEL: +351-917-546-613

JOSE ALBERTO MUNUERA LOPEZ
C/.Girona, 12 08339-VILASSAR DE DALT Barcelona, SPAIN
TEL: +34-654-31-67-37

PROCESS CONER II **QPRO EX**

Automatic Winder

MURATA MACHINERY, LTD.

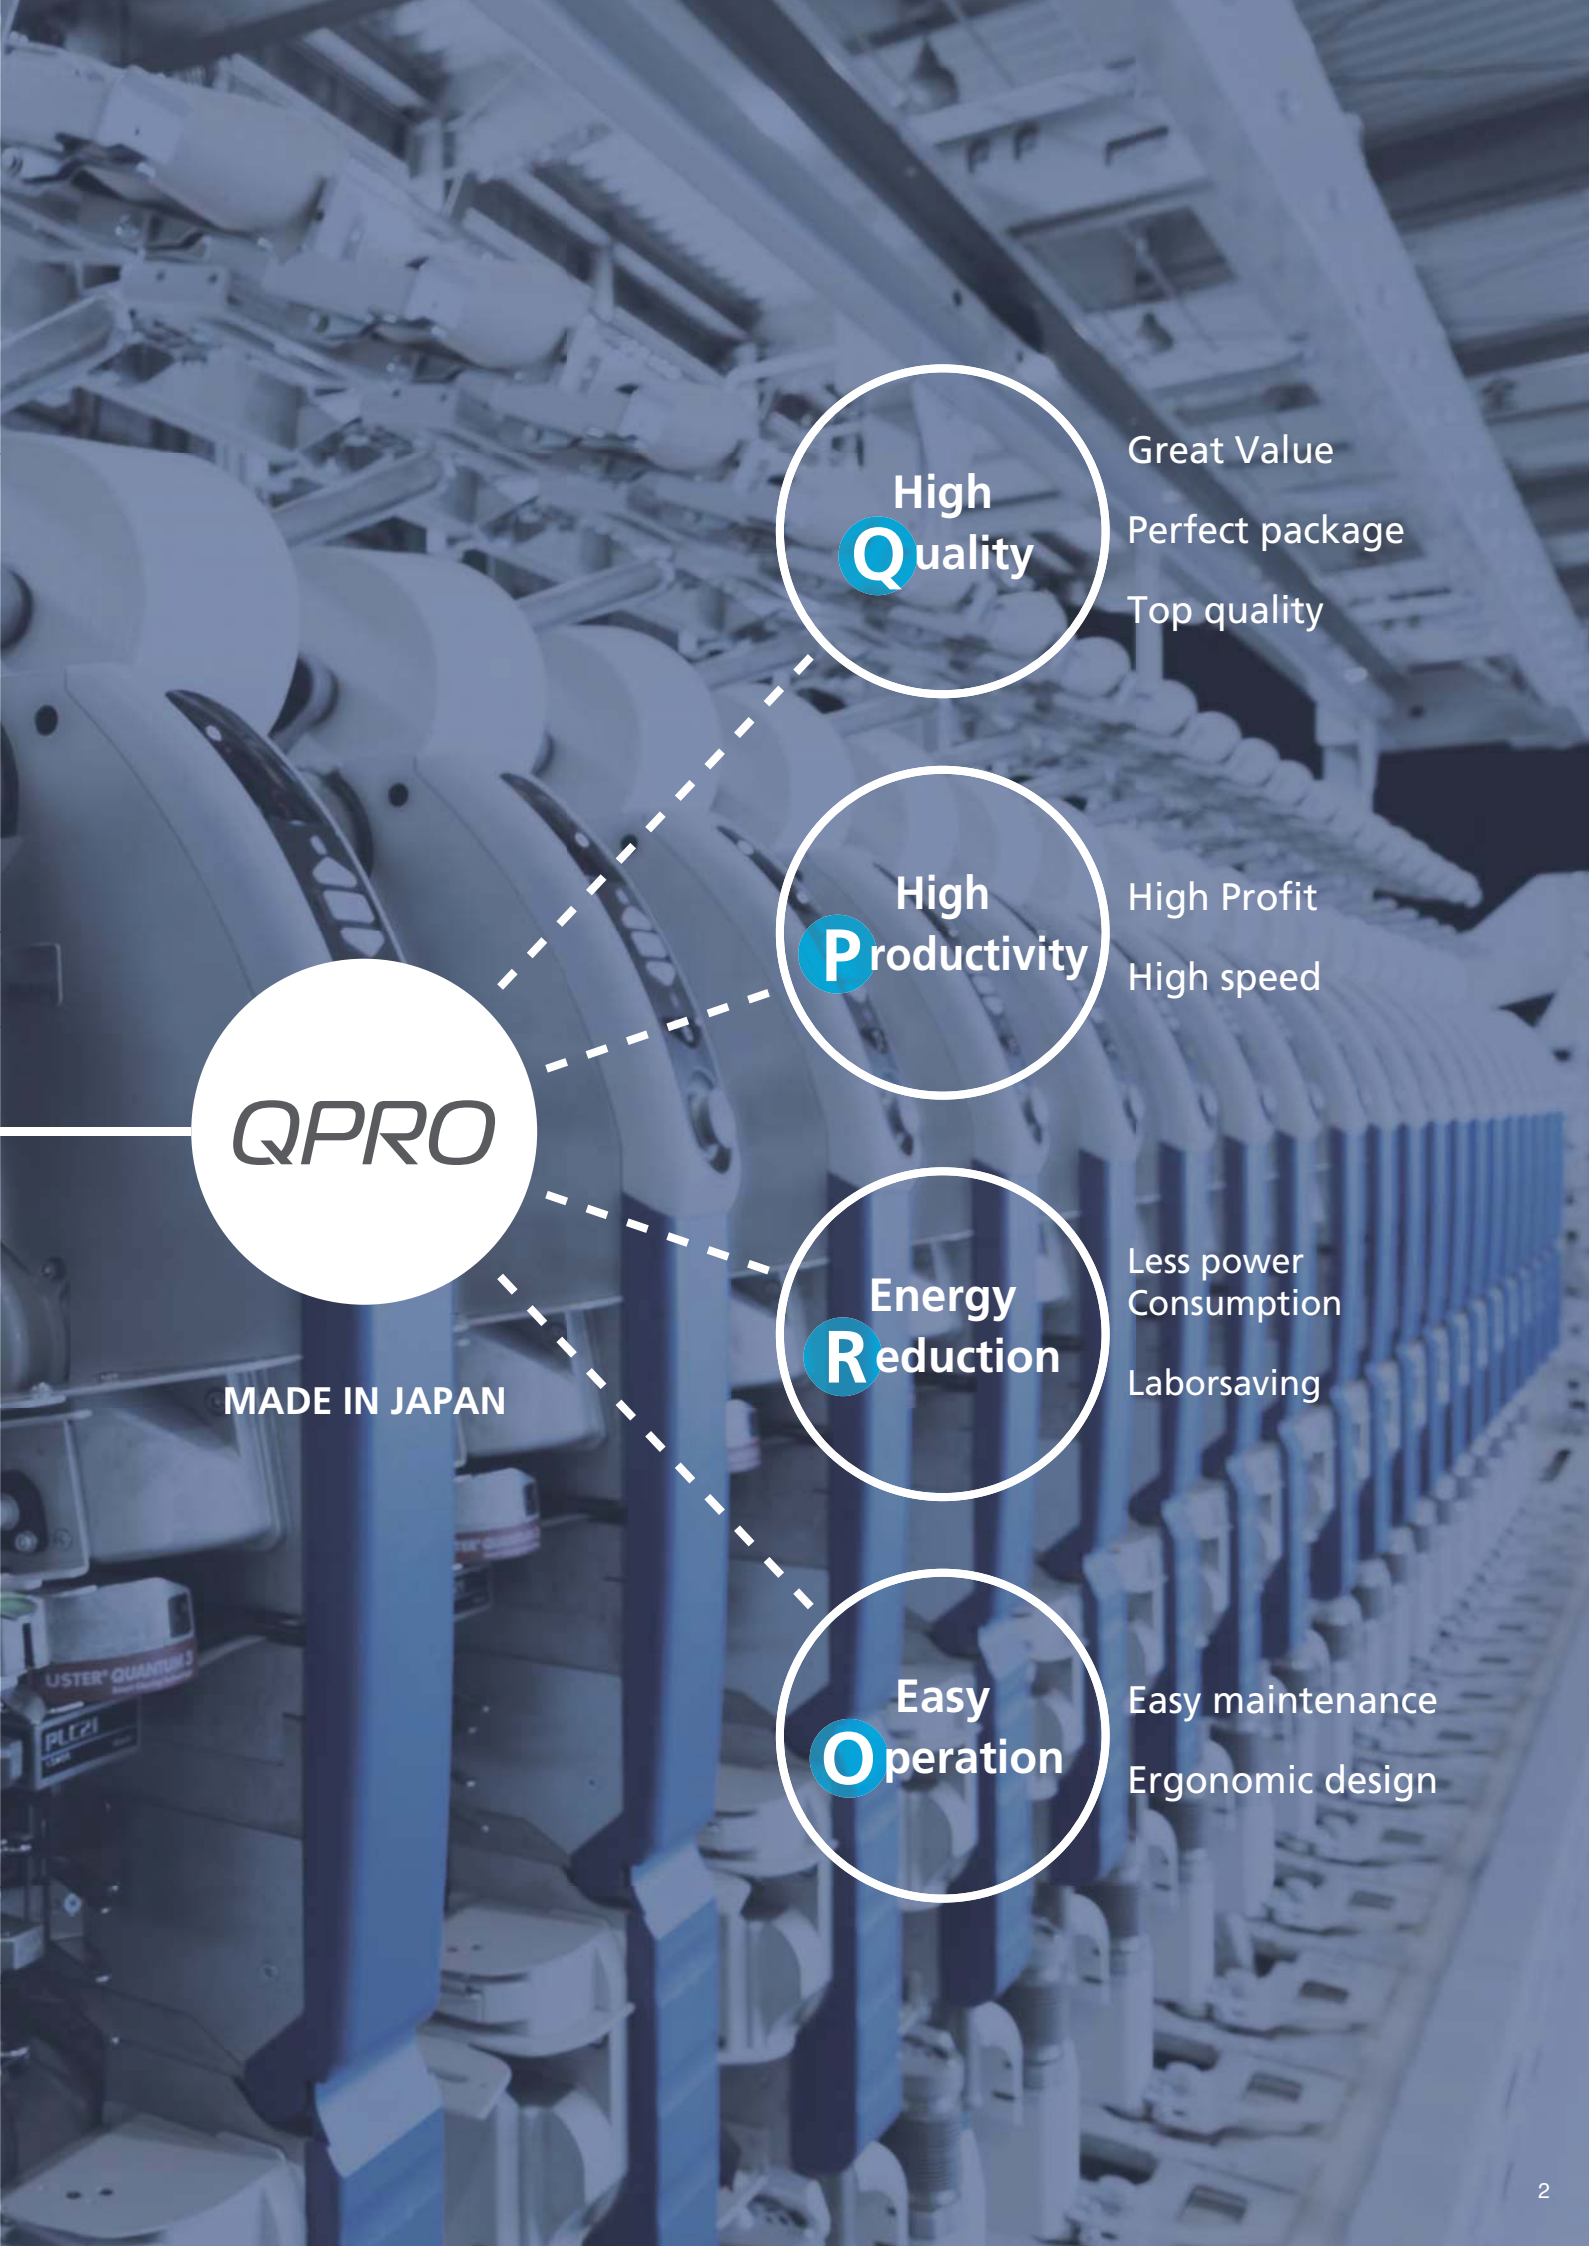

Maximize your Benefit ←

QPRO

MADE IN JAPAN

High
Quality

Great Value
Perfect package
Top quality

High
Productivity

High Profit
High speed



Energy
Reduction

Less power
Consumption
Laborsaving

Easy
Operation

Easy maintenance
Ergonomic design

QPRO EX Overview

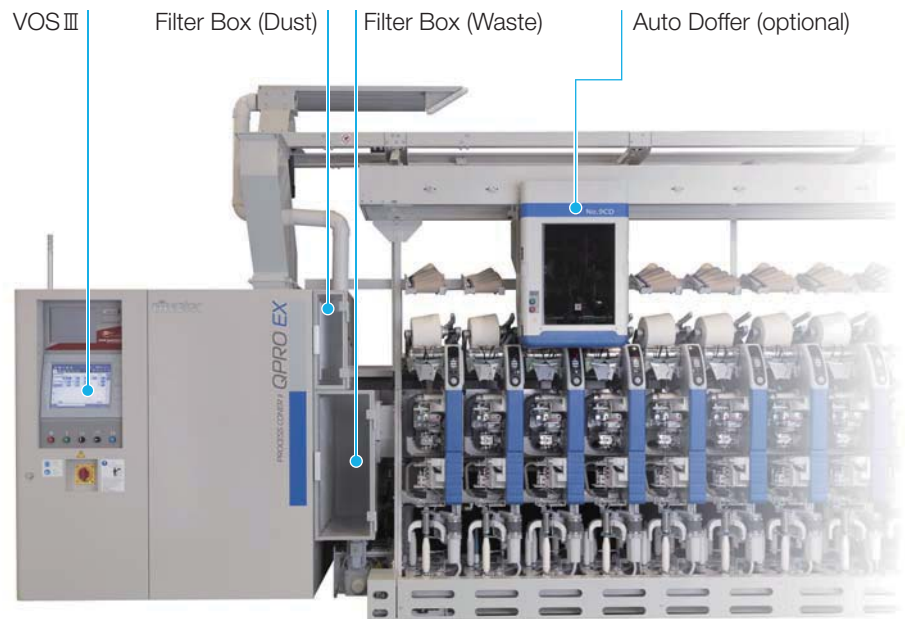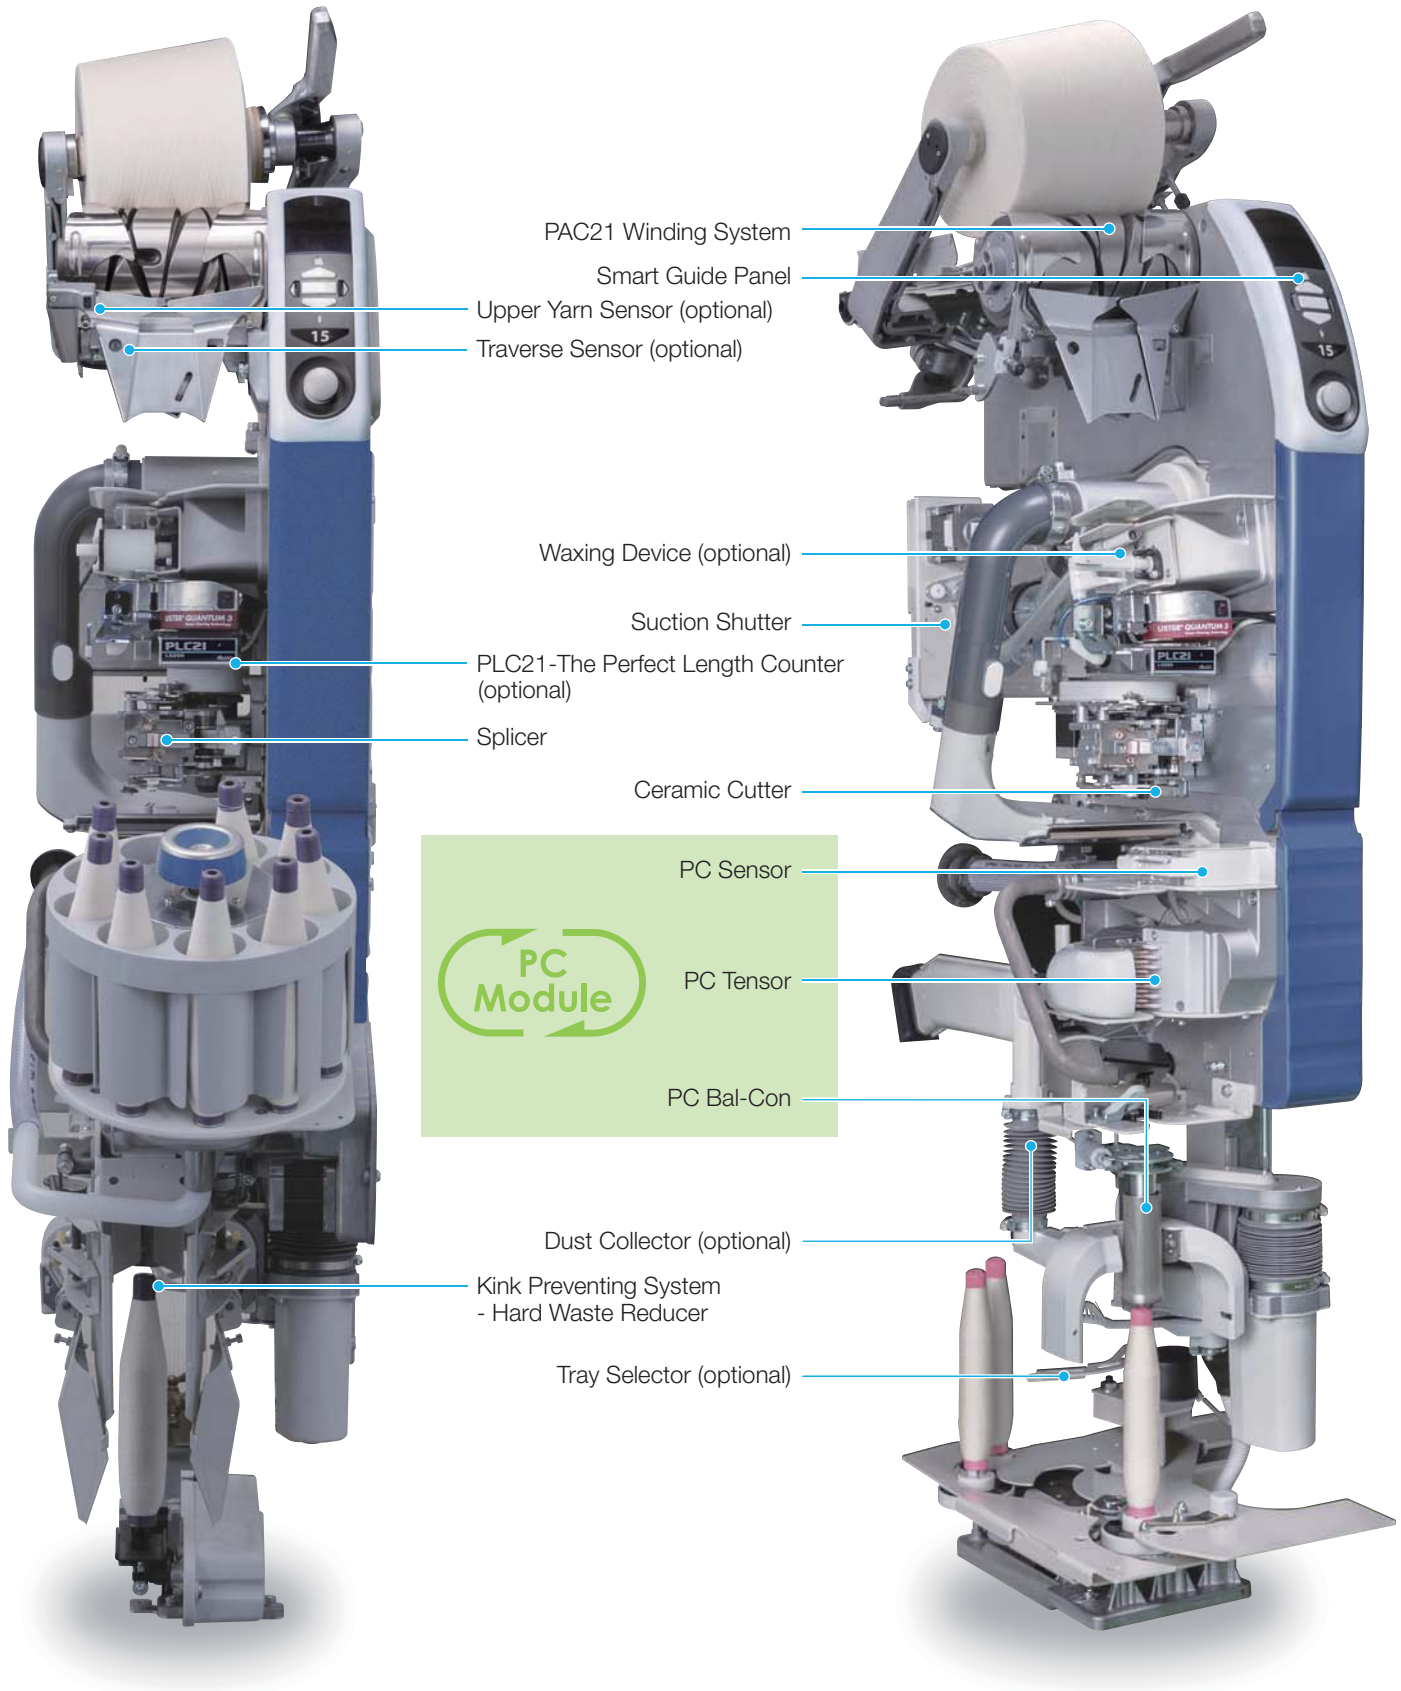


Straight Magazine



VCF





Bobbin-tray

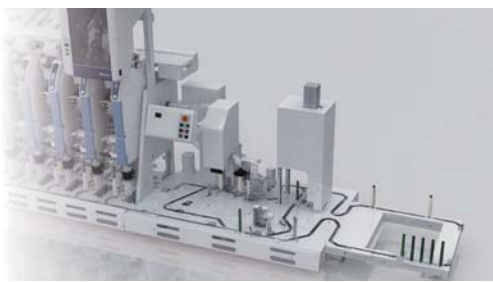


Link Coner

- Realizes stable winding from start to end of the winding process by giving instantaneous feedback of yarn tension from the bobbin to package by PC Module.
- In order to realize even greater stability in unwinding, activates the bobbin automatic centering function. This allows for yarn unwinding at higher speeds to improve productivity.
- Devices including the drum motor, splicer, and suction mouth are independently driven to optimize the splicing cycle.

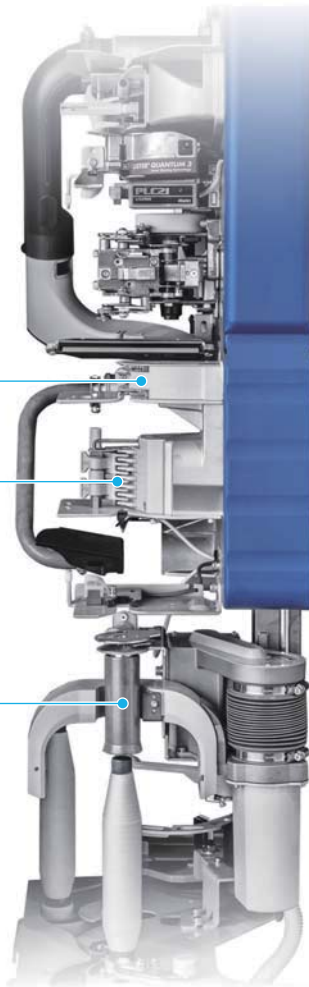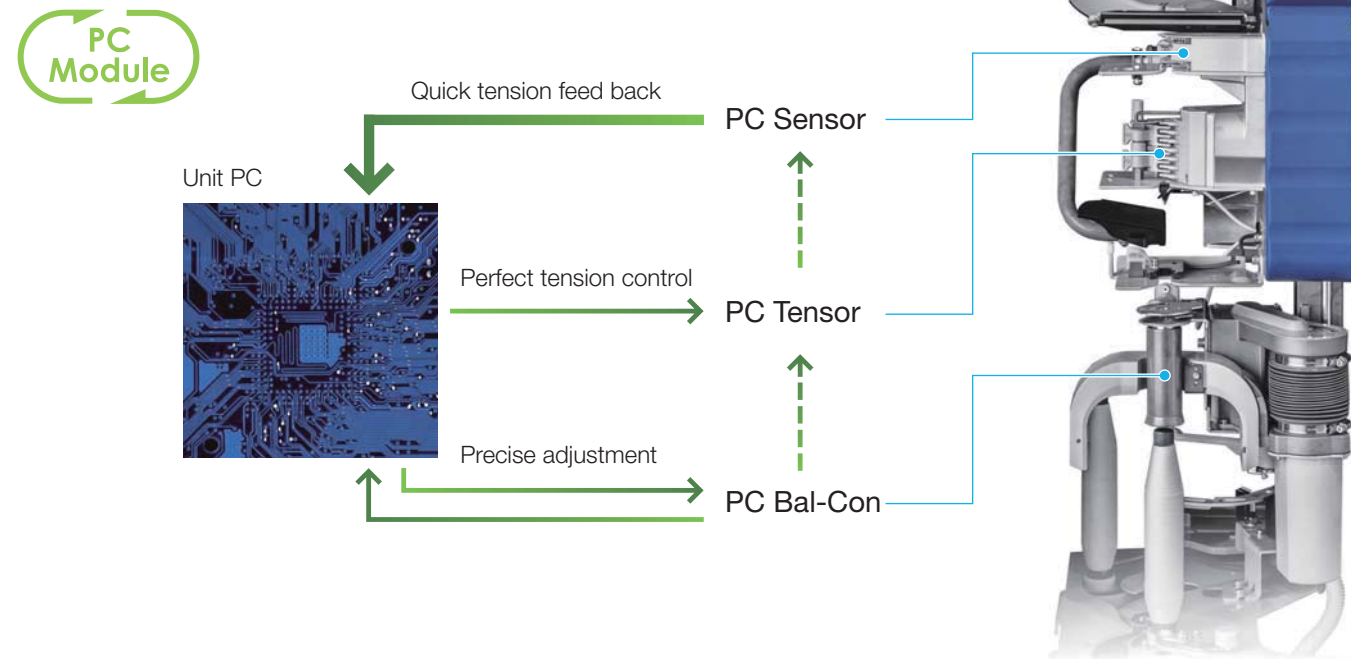


PC Sensor

In addition to the feedback function of yarn tension, PC sensor prevents package rejection caused by tensor error, which may occur due to tension deviation or component damage in yarn path.

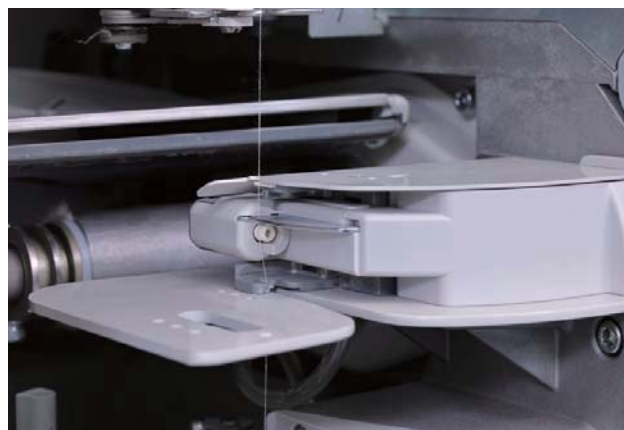

PC Tensor


Pressurized tension is delicately controlled by two gate tensors located one above the other. Even sudden fluctuation in yarn tension can be handled accurately, enabling high-speed winding.

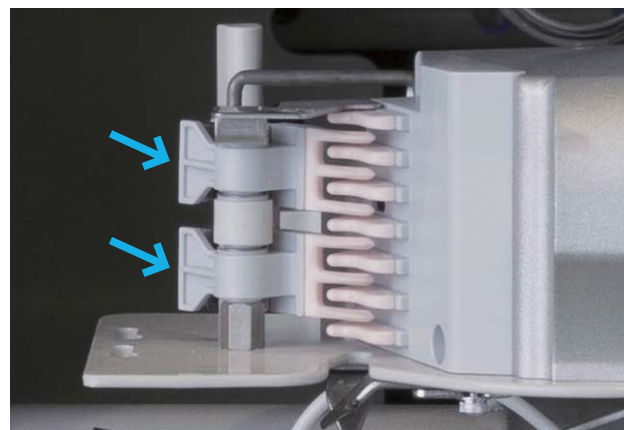


Tension feed back

Feedback is performed so that a uniform tension for winding by any bobbin can be maintained. Regardless of the shape of a bobbin, high quality winding is realized.

● Without Tension Feed-back (Conventional machine)

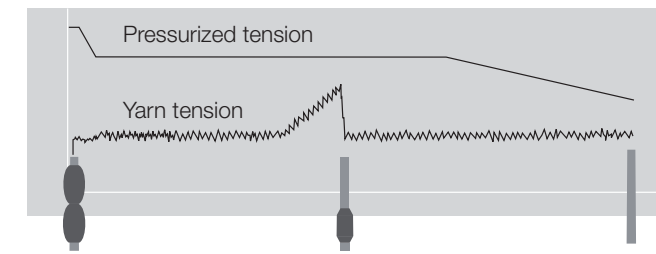

● With Tension Feed-back

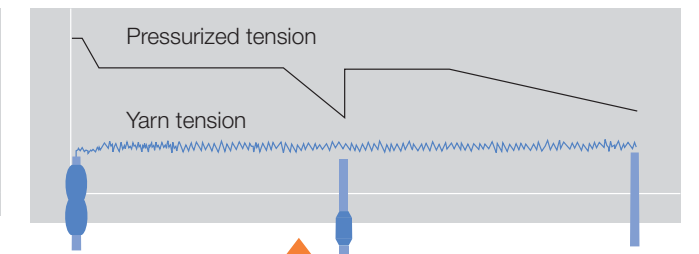


Realizes stable winding tension


Through tension feedback from the PC sensor and PC Bal-Con, unstable yarn tension from start to end of the winding process are controlled, realizing stable high-speed unwinding.

Ne 30 - 1500 m/min


● Without Tension Feed-back ● Without Bal-Con

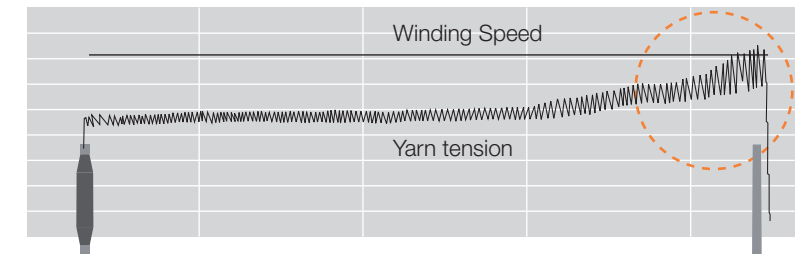

● With Tension Feed-back ● Without Bal-Con

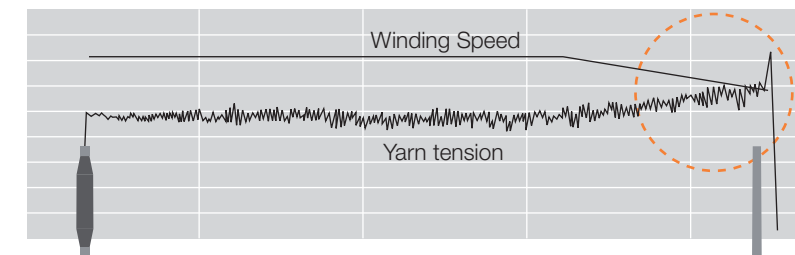

● With Tension Feed-back ● With Bal-Con

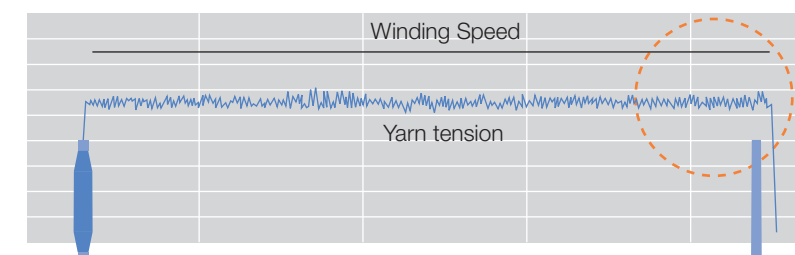

PC Module



Perfect Ballooning

PC Bal-Con



PC Bal-Con continuously moves along the bobbin, creating a ballooning in order to maintain a uniform winding tension from start to end of the winding process.

Combination of PC Sensor and PC Tensor further enhances the stability and boosts high speed winding.

Precise & controlled movement of PC Bal-Con by the motor driven slide screw ensures its accuracy.

Advantages of PC Bal-Con

1. High-speed winding
2. High productivity
3. Sloughing suppression
4. Hairiness reduction
5. Reduced hairiness generation
6. Reduced nep generation

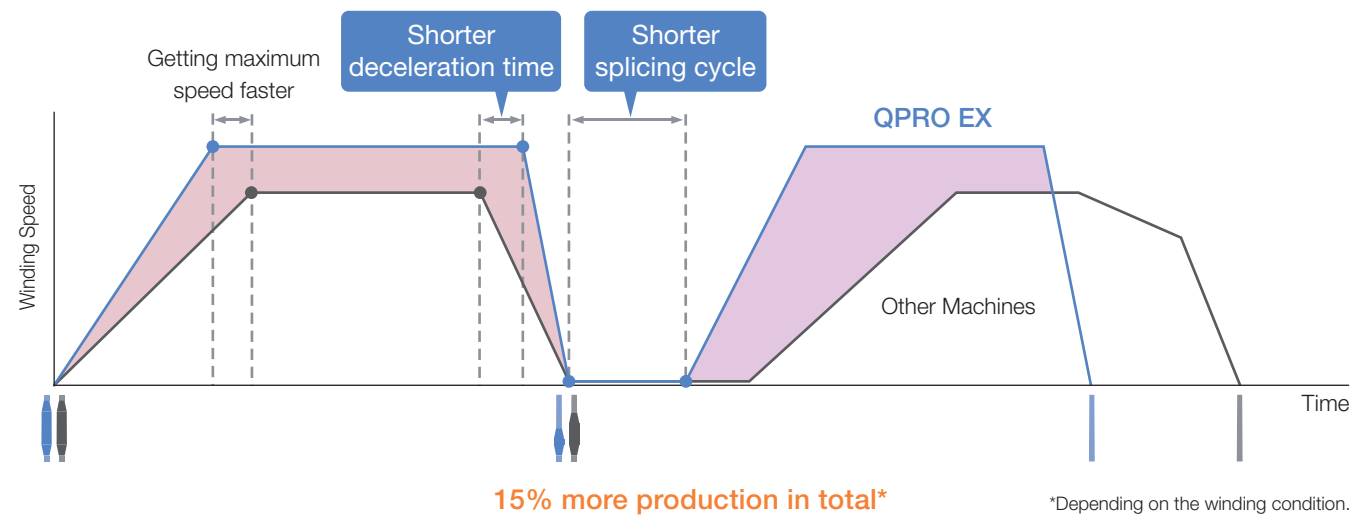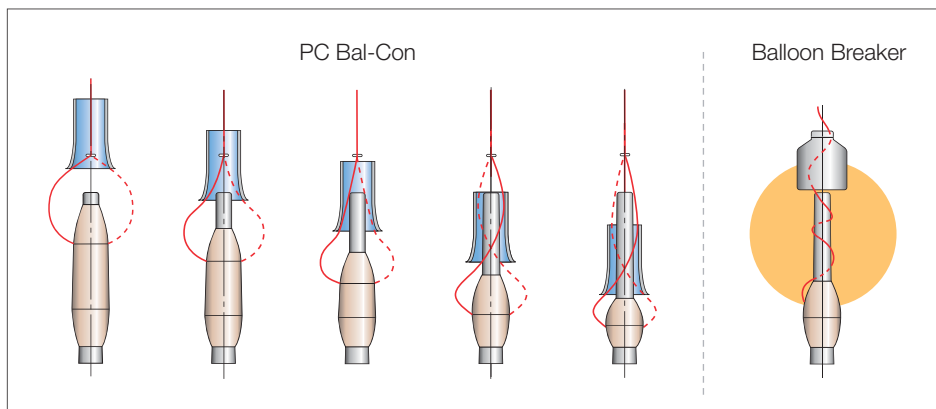


Auto Bobbin-Centering Function

The bobbin is continuously held in the ideal position by the sensor sensing the bobbin position. The bobbin can be maintained at the center of the Bal-Con by the sensor. Bal-Con with smaller diameters can be used, and this allows for high-speed unwinding.




Sloughing suppression

When unwinding the supply bobbin, the Bal-Con minimizes the contact between the yarn being unwound and the yarn layer on the bobbin. This results in a remarkable suppression during high-speed winding of undesired tension in the package, stitched package, etc.

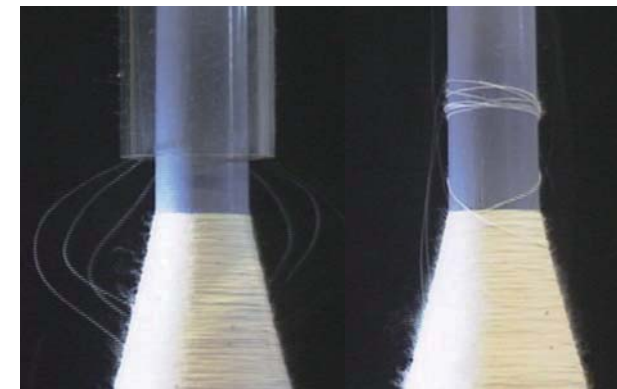


PC Bal-Con Balloon Breaker

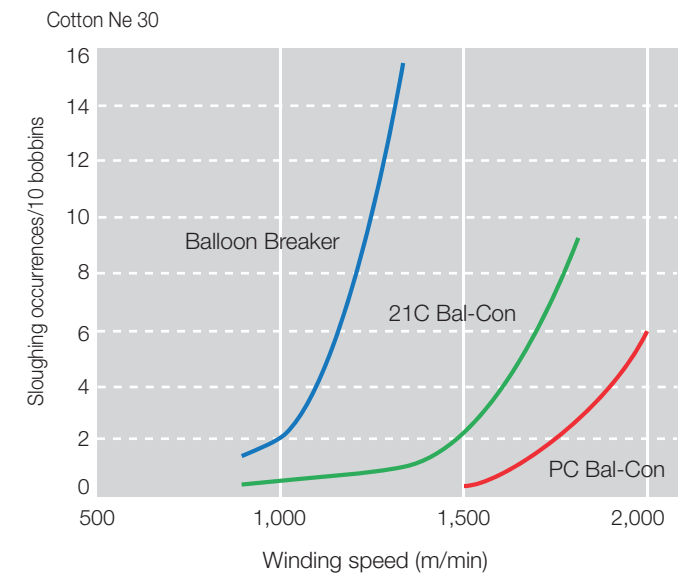


Suppression of fluff and hairiness generation

The chase surface does not generate hairiness as a result of non contact with unwound yarn, and hairiness is reduced in all sections, from the top to the bottom of bobbin.

Increase rate of fly waste generation Carded cotton Ne 23

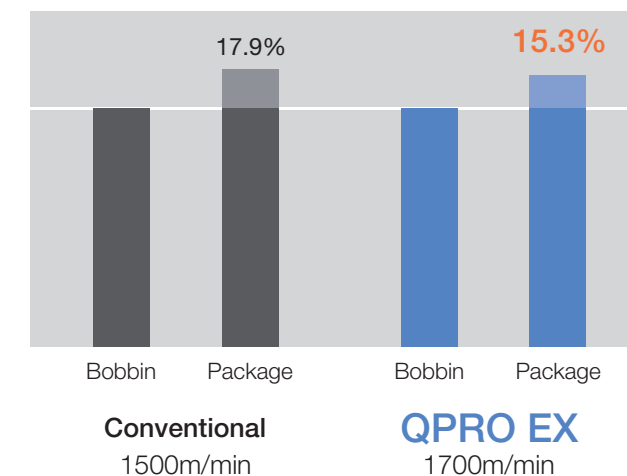

Total IPI increase rate Carded cotton Ne 23

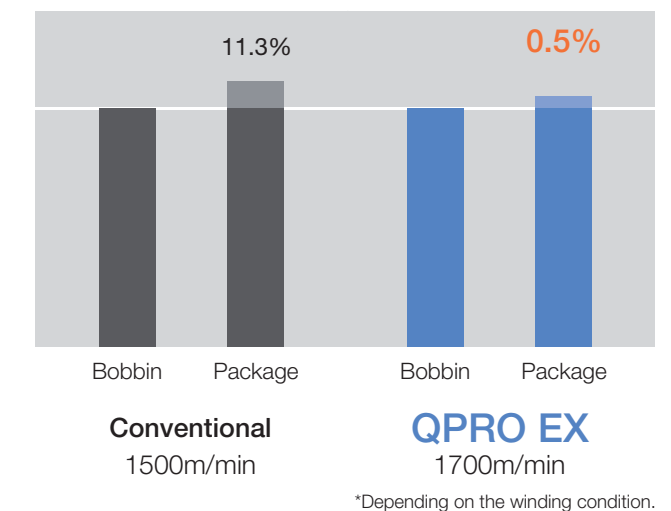

Perfect Package

PLC21-The Perfect Length Counter (optional)

PLC21-The Perfect Length Counter is a non-contact photoelectric type and precisely detects the length of yarn to be wound without making contact with yarn. Based on the detected data, the VOS (Visual On demand System) controls the winding length of a package to rewind at a uniform speed so that a precise fixed length winding ($\pm 0.3\%$ *) can be realized (*This depends on the winding condition).

PLC21 minimizes yarn length variation between the packages.

- Precise fixed length winding($\pm 0.3\%$) can be achieved.
- Residual yarn on warping can be reduced by approximately 2.5%.
- Workload reduction in weight adjustment during packaging.
- Power saving by reducing the winding time (yarn length).
- Rewinding of Remnant cone is reduced.




Weight adjustment during packaging

The workload of the package weight adjustment can be significantly reduced, especially when handling yarns for knitting (waxed) with weight variation.



Weaving

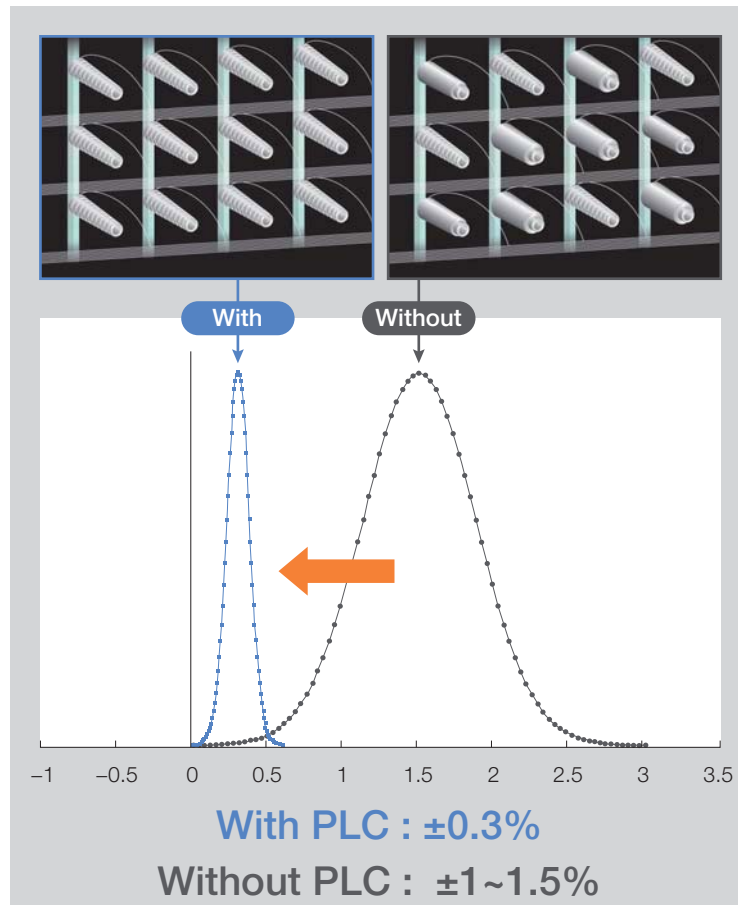

* The above data is for your reference.

Traverse Sensor (optional)

Yarn traverse is always checked and a unit is stopped if any irregular traverse occurs to avoid yarn lapping or defective packages. Recommended for fine count yarns requiring strict control of yarn over, chemical synthetic fibers, and wool yarns.



Suction Mouth

Suction mouth features its economical design which is realized by computer analysis of air flow. Yarn end is precisely suctioned out even by lower suction pressure. In addition, the pulse control achieves a precise distance to package.



Kink Preventing System - Hard Waste Reducer

Improvement in the shape of the brush increases stability further. Kink generation is prevented and package quality is improved.




Think ECO

Machine base design that minimizes pressure loss of the blower. In addition, each device of the unit is modularized and independently driven to suppress electrical power consumption. Outstanding energy reduction performance even with high-speed operation.

UKG


UKG : Unit per KG/ Power required for production of 1kg-package

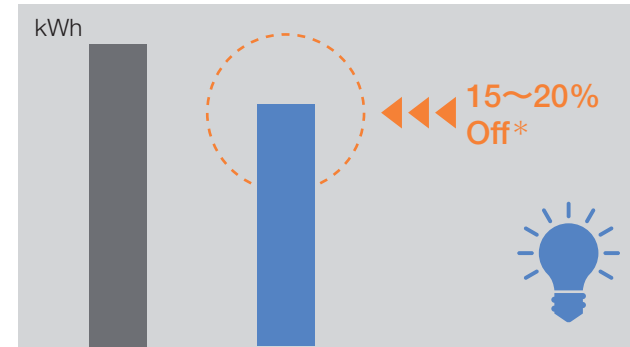

Other Machine QPRO EX


Package weight variation

Without PLC, with single air piping

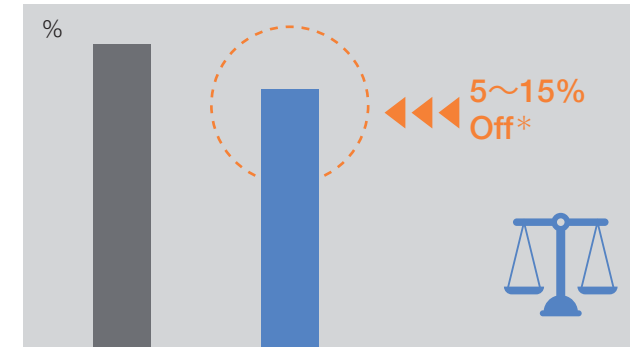

Other Machine QPRO EX

Wastage of yarn

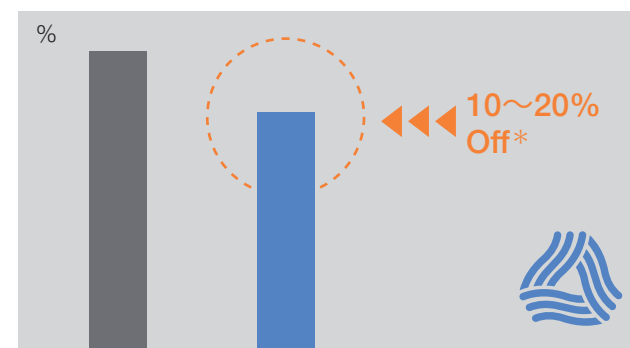

Other Machine QPRO EX

*Depending on the winding condition.

*Above performance of QPRO EX is based on standard specification.

Drum Motor

Power consumption is minimized by mounting a high-efficiency drum motor. This offers significant energy reduction even during high-speed operation.




Suction Shutter

Minimizes pressure loss, eliminates unnecessary air suction, and prevents waste yarn generation by independent drive of the shutter.




Upper Yarn Sensor (optional)

By quickly detecting the yarn from package, hard waste can be substantially reduced. The splicing cycle time is also shortened, contributing to increase the production volume.

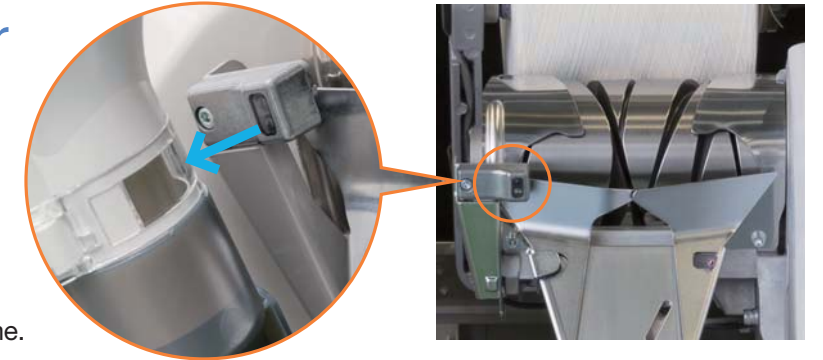


Wastage of yarn

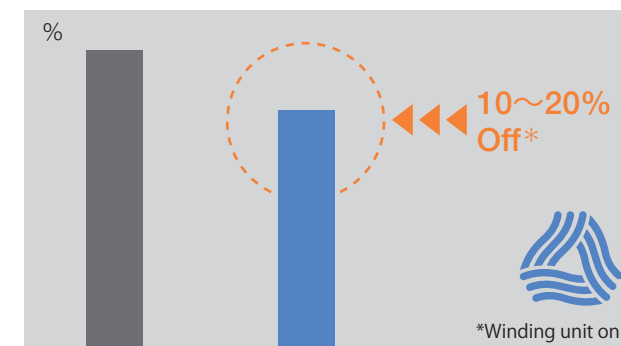

Without Upper Yarn Sensor With Upper Yarn Sensor

*Winding unit only

Production volume

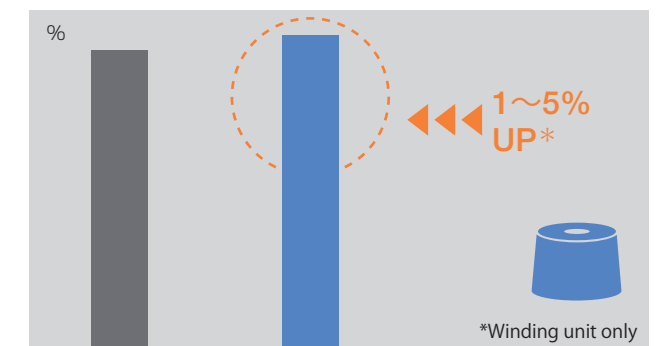


Without Upper Yarn Sensor With Upper Yarn Sensor

*Winding unit only


Blower

By setting a necessary static pressure value, blower Hz fluctuates so that the static pressure value is maintained. This realizes a higher energy reduction effect compared to the conventional frequency setting.

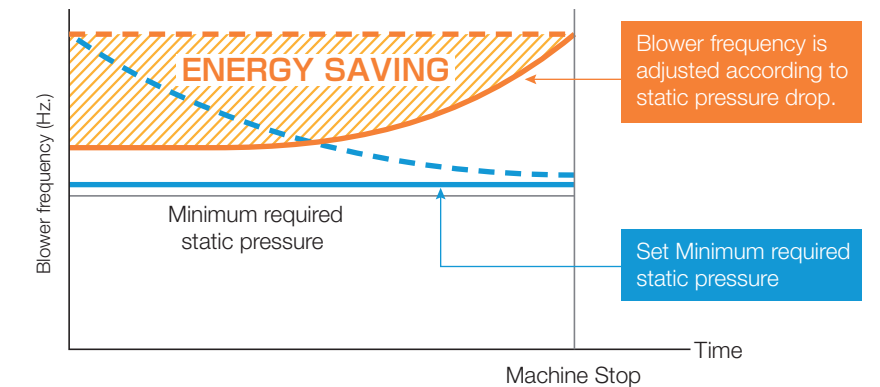


E-Drive

When finding the yarn end, the package is rotated at high speeds and the yarn end is easily found. Even if the static pressure of the blower is decreased, failure of the upper yarn end finding does not increase, contributing to energy saving.

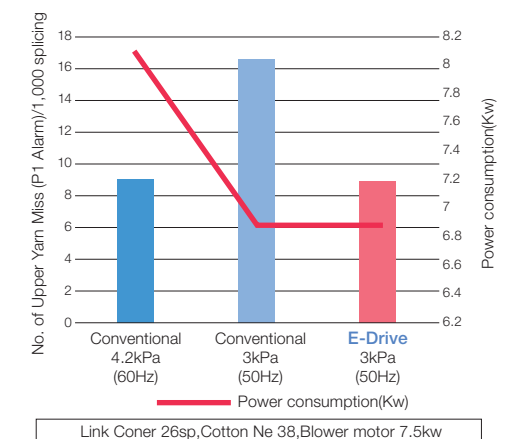


Think clean

Separate Chamber

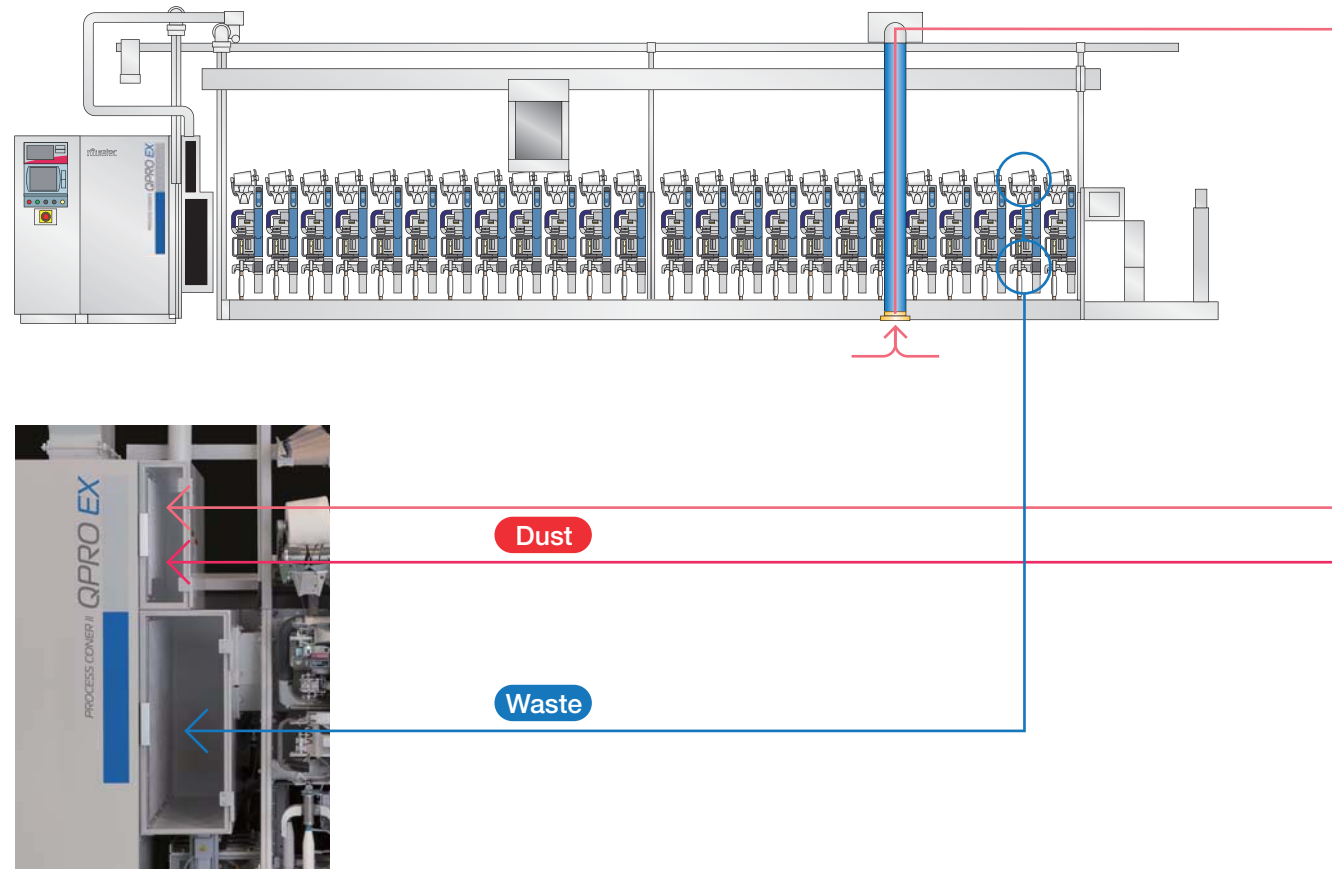

Dust Collector (optional)

Making the dust collection nozzle close to the dust source reduces waste yarn and dust generation to reliably collect dust.

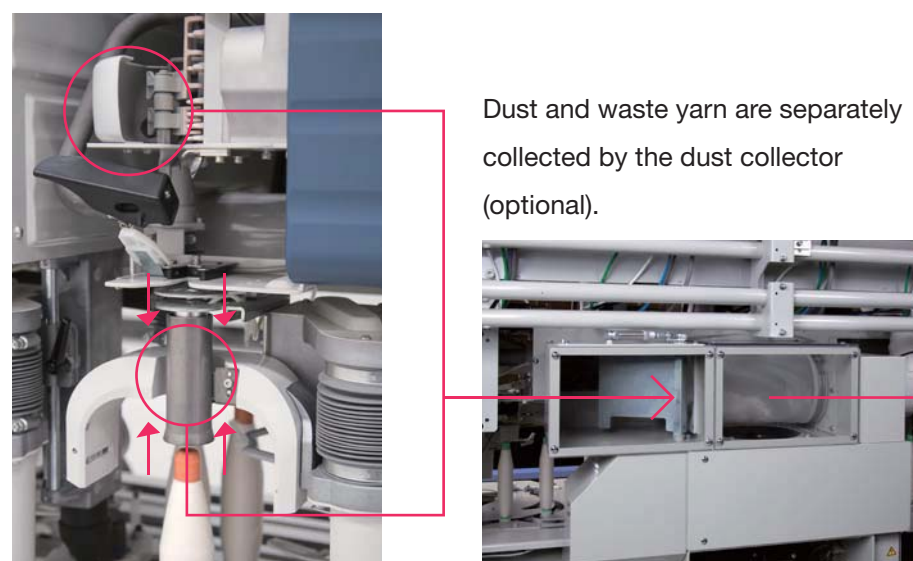

Dust free

By the dust-proof device independent structure, cotton fly is prevented from entering inside the machine. This allows an extension of maintenance cycle compared to before and a reduction in maintenance time.



Bearing Center




Suction Shutter



Suction Mouth



Joint pipe

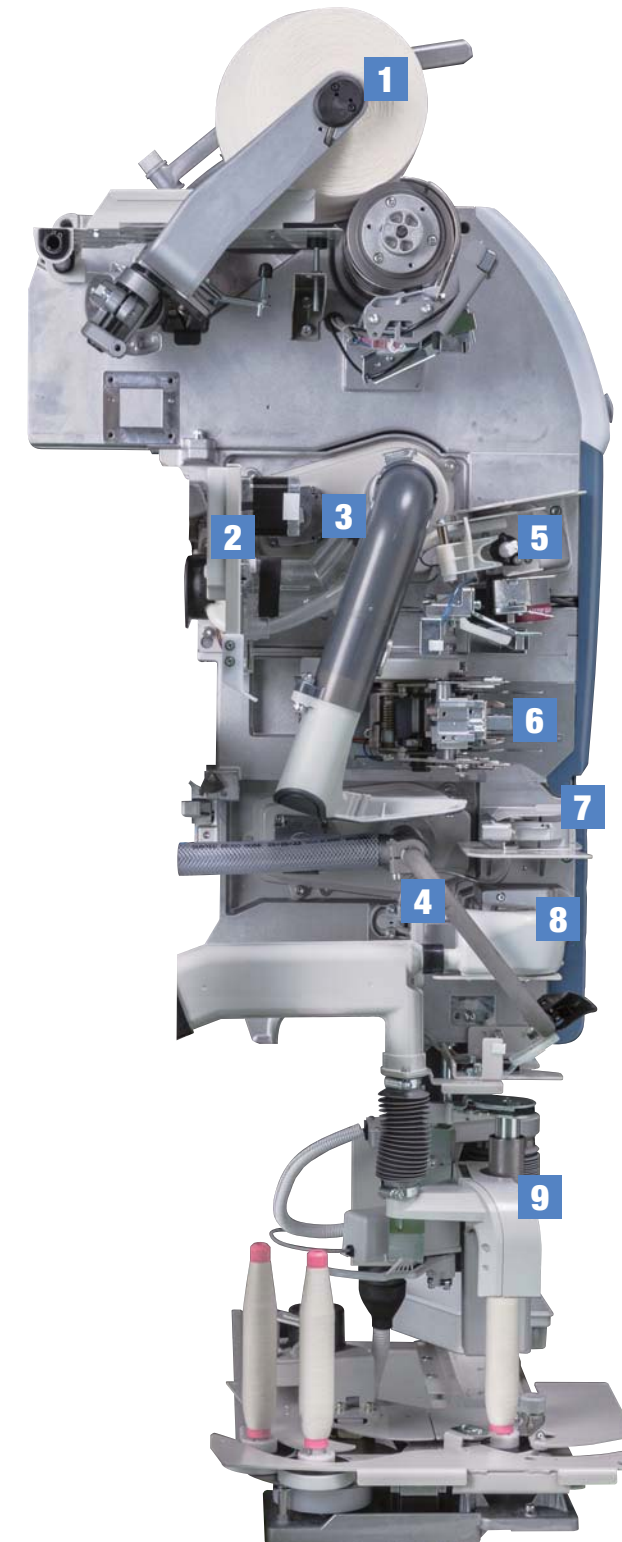

Waxing Device



Splicer



PC Sensor



PC Tensor




PC Bal-Con

Think Operation

Completely independent structure of each device facilitates detachment and attachment for maintenance, and reduces maintenance time.

Smart Guide Panel


The smart guide panel built in each unit is an LED display and remarkably improves visibility. This lights blue to indicate a full bobbin. When the LED lights red, this indicates a maintenance call and informs of trouble spots (upper, middle, and lower sections) in the machine base.

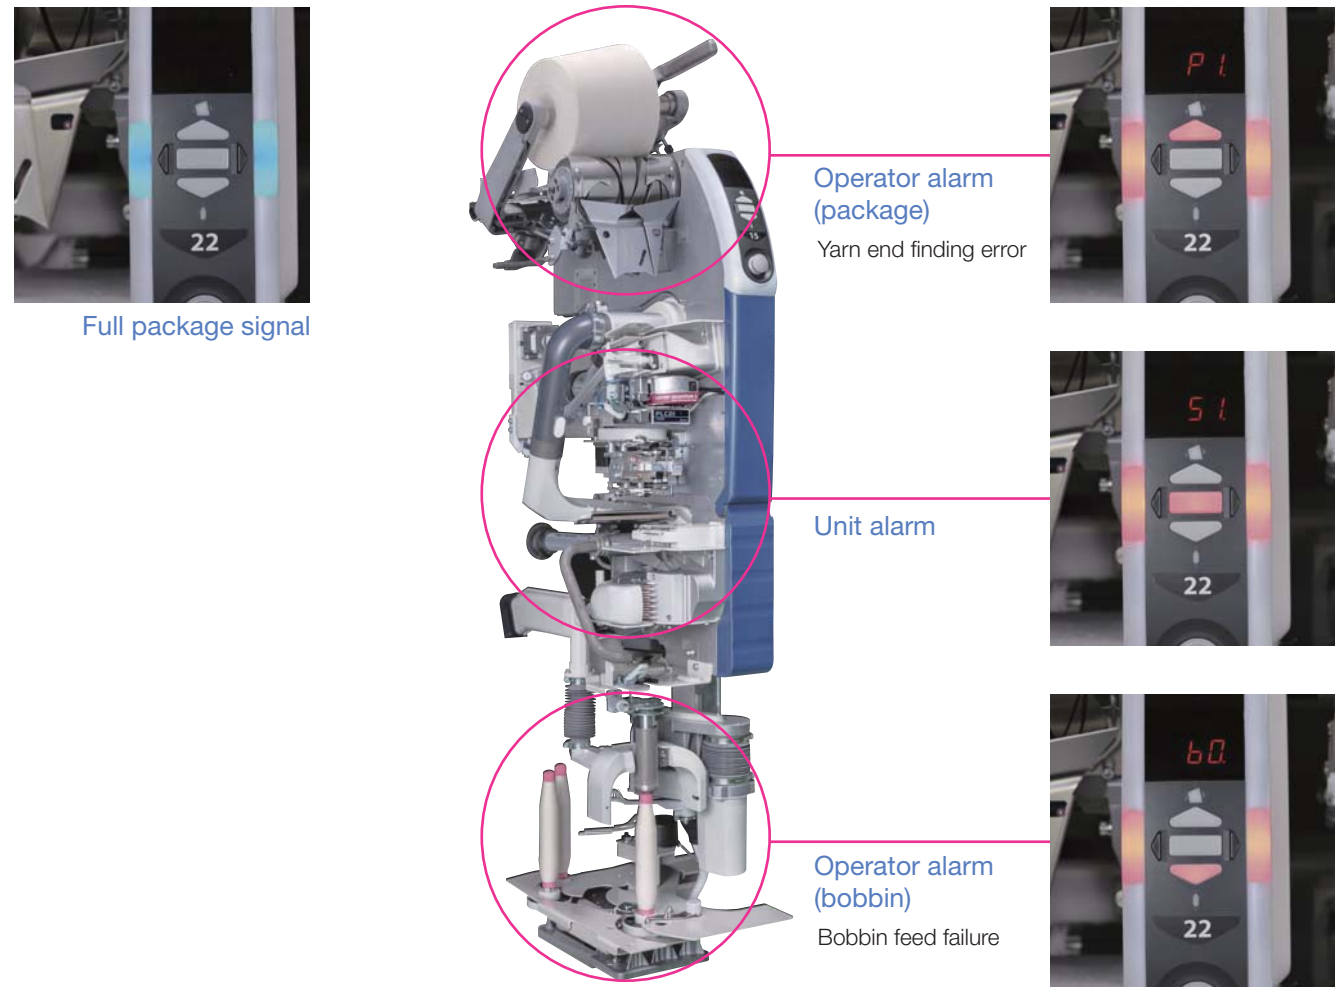

Simple design

Allows maintenance for each unit by inclining only the upper half frame of the machine forward. Maintenance convenience is improved to shorten maintenance time.

In addition, as machine design pursues maintainability, maintenance can be performed without removing the air pipe, etc.

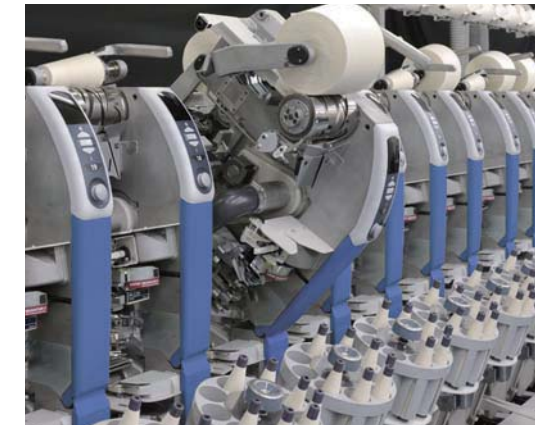


Unit Checker

A wide range of winding functions including Input /Output signals and inching motions can be checked with three-digit display on each unit. No special device for conformation is required.



Vibration sensor

This sensor detects abnormal vibrations and gives alarm and stops the winding unit.

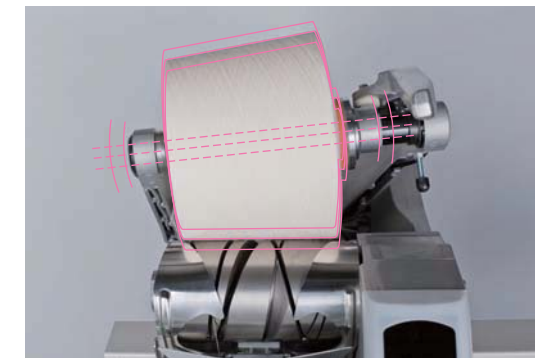

Ceramic Cutter


Has a life approximately ten times longer than steel cutters, and needs no periodic lubrication.



Smart & Easy

VOS III Visual On-demand System

- Smooth operability with 15" touch panel.
- Memory lot number is up to 200 in 30 groups.
- Data can be easily downloaded by use of a USB memory.

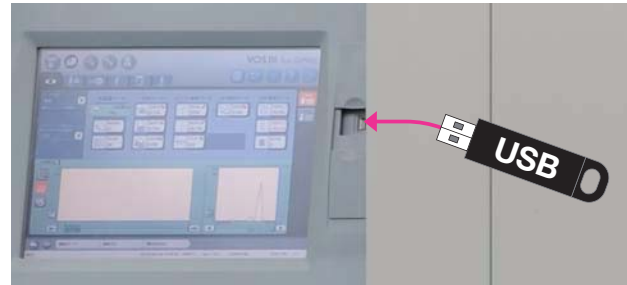

Machine setting Operational condition




Real-time alarm check

Displays the current situation of alarm indicating the location and causes with picture.



Running cost management

Measurement of waste yarn amount is not required.

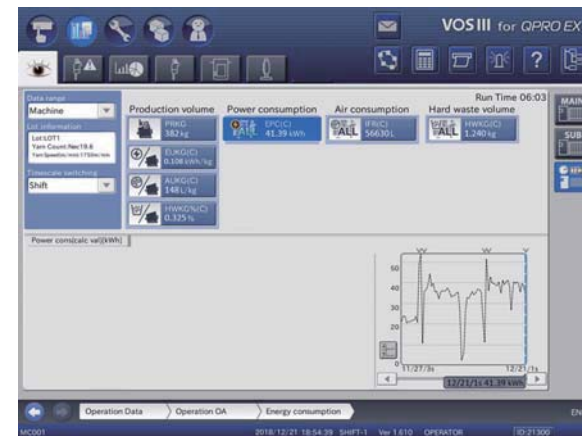

Analysis of machine efficiency

Check cause of unit alarm simply and quickly.



① Analysis of machine efficiency


Machine efficiency, ratio of unit stoppage time, ratio of alarm stoppage time



② Analysis of causes of unit alarm stoppages

Ratio of causes of unit alarm stoppage

Muratec Smart Support mss (optional)

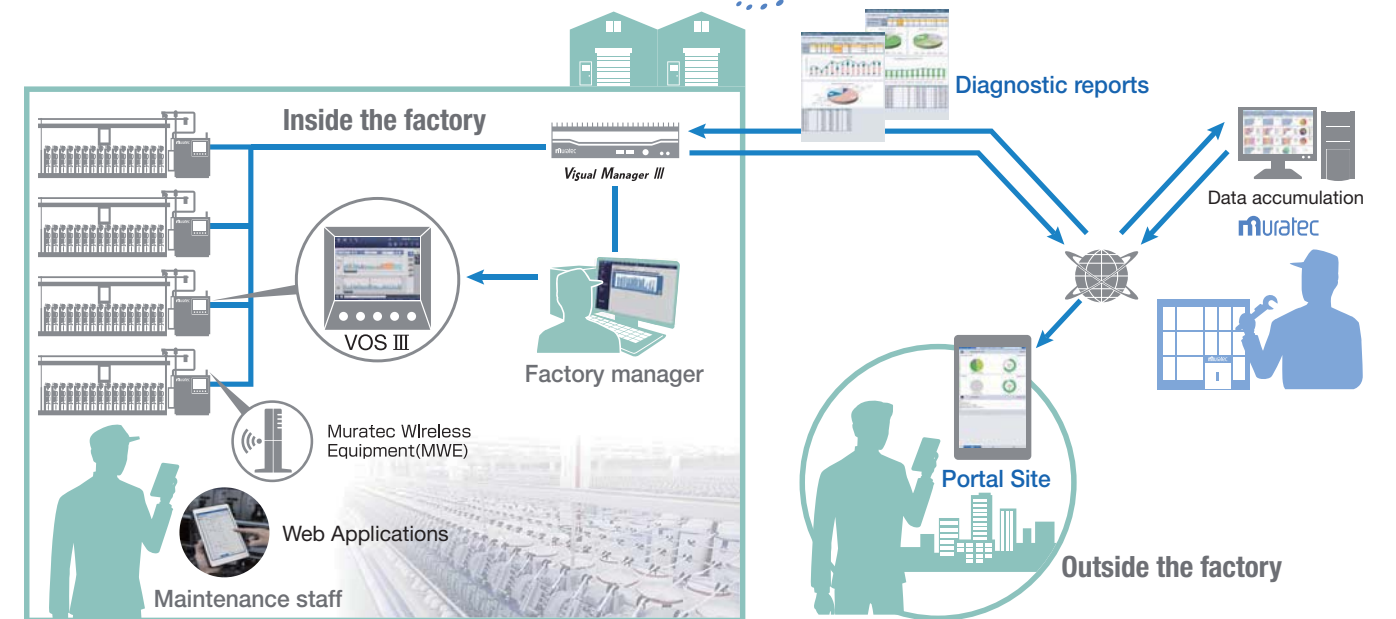

Visual Manager III (optional)

Visual Manager III is a total management system that enables overall management of production, quality and maintenance of automatic winders. Simplification of production management, quality management, and maintenance management, which have conventionally been performed on a machine basis, will be realized by performing them on a plant or lot basis.

Machine management

The system helps to improve the maintenance, machine efficiency and product quality.

Maintenance

The system analyzes the operation data and suggests the maintenance activity.



Quality

Product quality is automatically improved by better maintenance.






Production

Graphical report of production data is available for each machine, each lot and each group.



Document management

Instruction manuals and parts catalogues of particular machine are available.

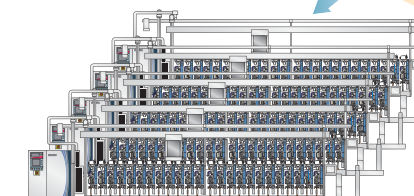

Futher Usability

AD-Automatic Doffer(optional)

The Automatic Doffer achieves a top traveling speed of 52m/min. The packages doffed in a 10-second cycle are automatically loaded into either the conveyor or the shelf installed at the rear of the machine. Also equips the auto-adjustable-chucker that allows handling different types of winding bobbins(cone and cheese) by one machine. AD automatically judges to perform only package doffing operation in lot change.



Specifications

Doffing Time	10 seconds
Traveling speed of AD carriage	Maximum 52m/min
Amount of take-up tube stock	3°30' : 7pieces 3°51' : 5pieces 4°20' : 6pieces 5°57' : 5pieces
Take-up bobbin size	Standard specifications: Minimum diameter (d): ø47mm Maximum diameter (d): ø83mm Maximum length (L) : 182mm
Package diameter	Maximum : ø320mm Minimum : ø140mm

Package Shutter (optional)

New package shutter performs two-stage transfer to absorb impact when a wound package is transferred to the conveyor.




Waxing Device (optional)

Stable and uniform waxing is made possible by a rotary-driven positive motor. When wax isn't required, the motor stops and saves energy. Available for both S twist and Z twist directions. Can use wax with max. 45mm in length up to 3mm in thickness, and is equipped with a wax remaining alarm.



PAC21 Winding System


Muratec's Multi-grooved Drum has a control system that switches the drum groove to the diameter at which patterning(ribbon) occurs and produce the quality package to facilitates the unwinding.

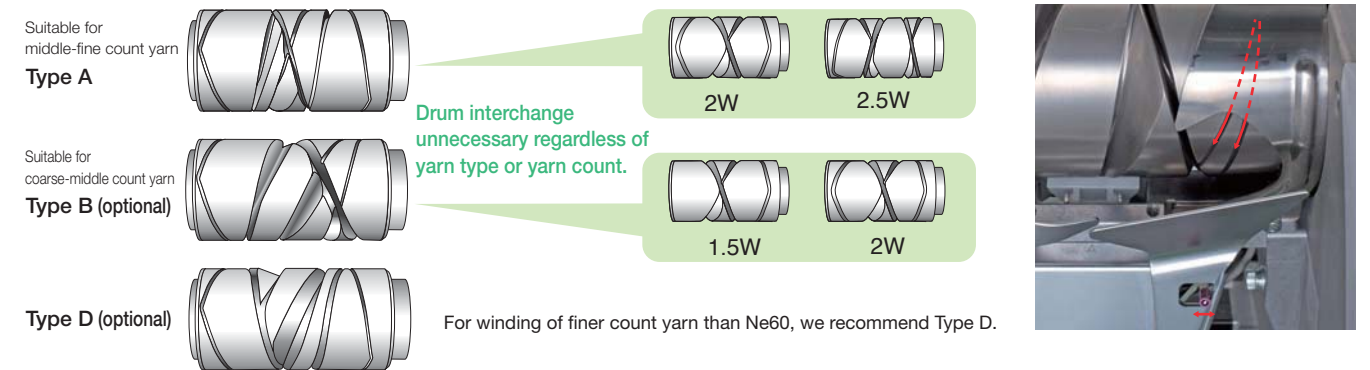



Jumping mechanism

PAC21, the drum wind controller is used to form a package suitable for high-speed unwinding. This is achieved by switching the number of winds before and after this particular package diameter (excluding Type-B).

Winding on 2.5W base Carded Cotton Ne40

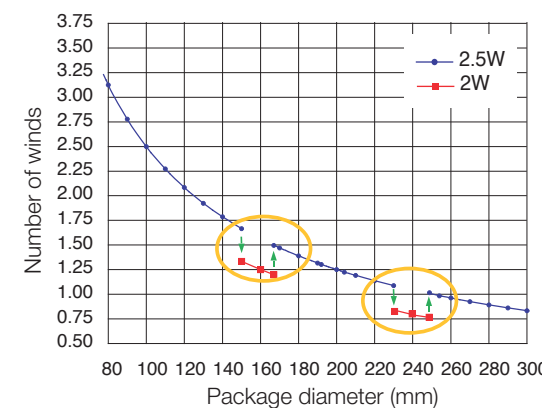

Stable and high-speed unwinding

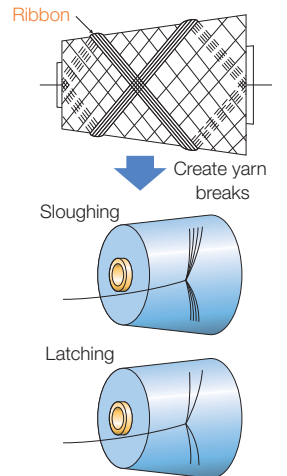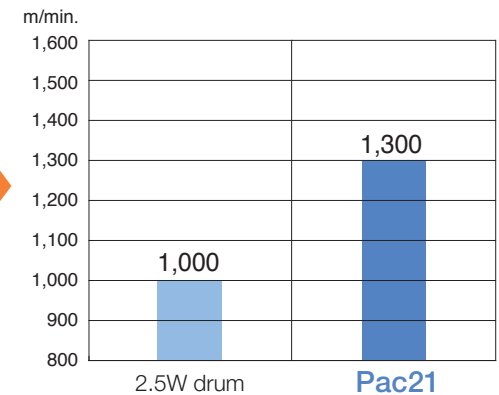


Rough standard of available yarn count

Drum	Yarn Count (Ne)	Winding Shape			
		Regular Package		Dye Package	
		Cone	Parallel	Parallel	Cone
Pac-A	2.5W	○	×	×	×
	2W	○	○	※	※
Pac-B	2W	3°30' ~ 4°20'	○	※	※
	1.5W	3°30' ~ 4°20'	○	※	※
Pac-D	2.5W	4°20' ~ 5°57'	×	×	×
2W		※	○	○	※


○ : Available ※ : Condition Apply NA : No Applicable

Splicing Technology

Splicer

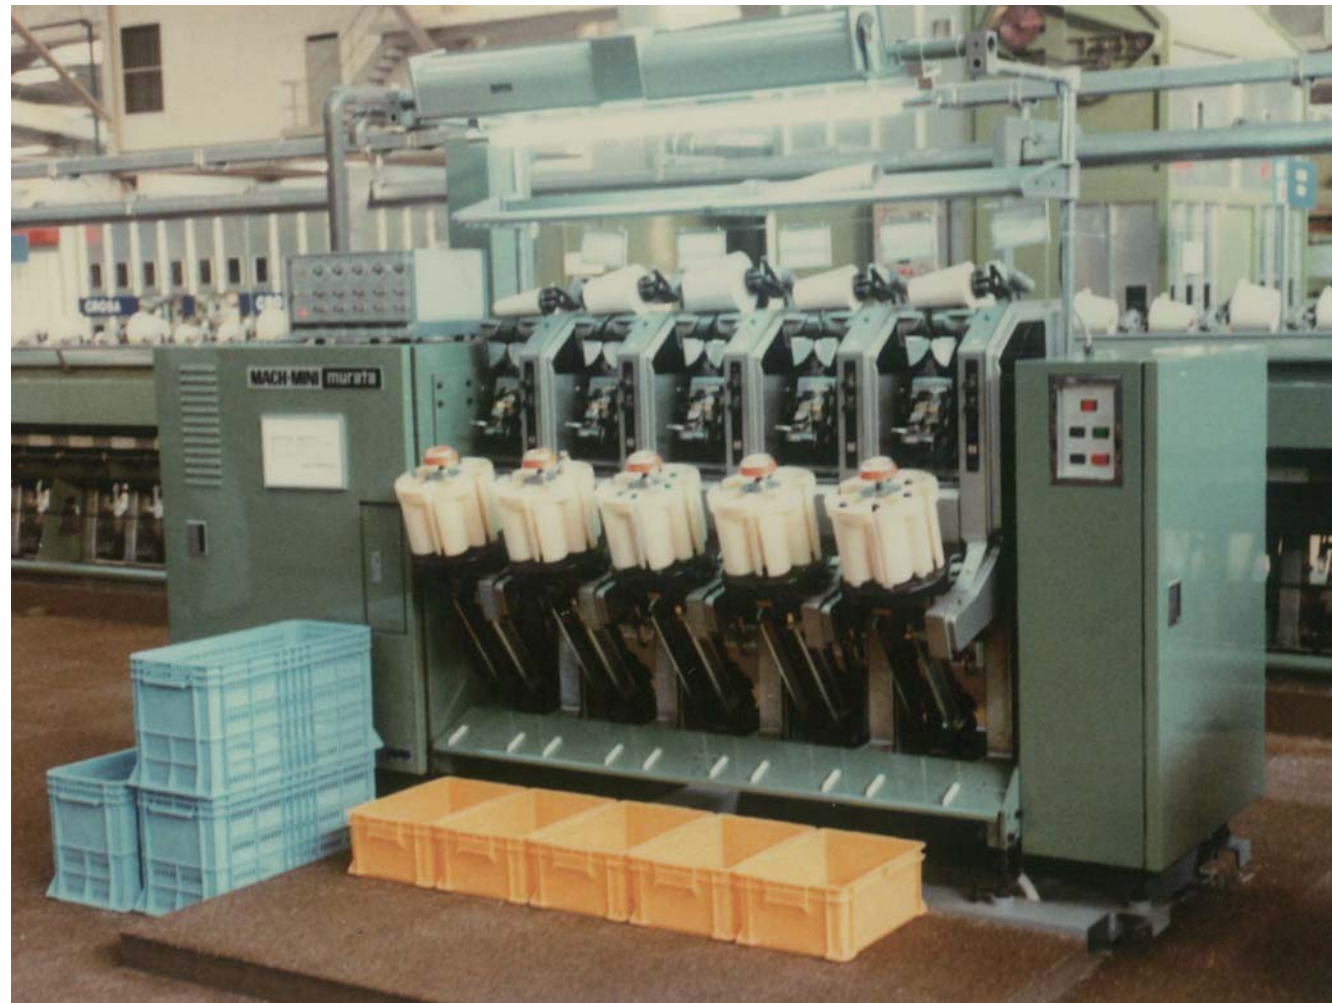

Exhibited the automatic winder, No.7 MACH CONER (with Mach Splicer) at ITMA'79 in Hanover, Germany.

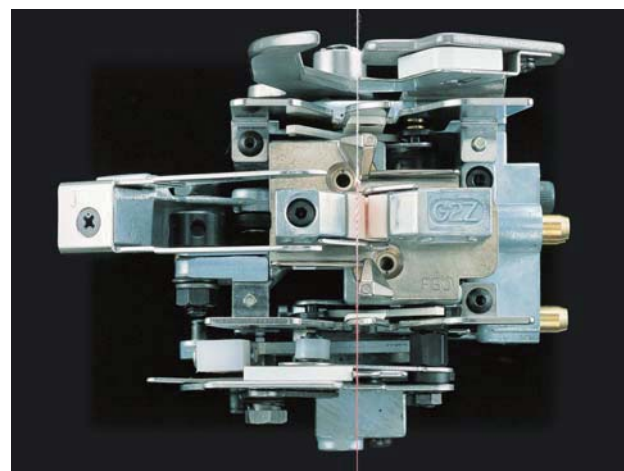

In 1979, Muratec was the first company in the world to develop "Splicer Technology", rewriting the history of the textile industry until that point in time. "Yarn with no joining points" made it possible to improve final textile product quality. Splicing minimized troubles caused by joints in spinning and post-spinning processes. Enabled high speed leading to significant improvements in textile productivity. Since its development, the Splicer continues to contribute significantly to the production of textile products. It is widely used for more than 40 years as worldwide standard technology for joining spun yarns.

Splicer Line-Up

Air Splicer

Cotton, Cotton blended, Synthetics etc.




S.A.S. (Stretch Air Splicer) (Optional)

CSY (Core Spandex Yarn) with Cotton, Synthetic cover




Water/Air Hybrid Splicer (Optional)

Cotton Coarse count, CSY (Core Spandex Yarn) with Cotton cover, Ramie or Linen blend etc.

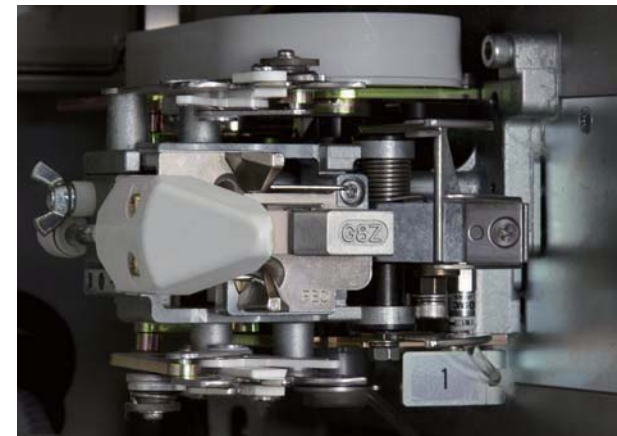


Water Splicer with Beater (Optional)

Cotton 100% 2ply

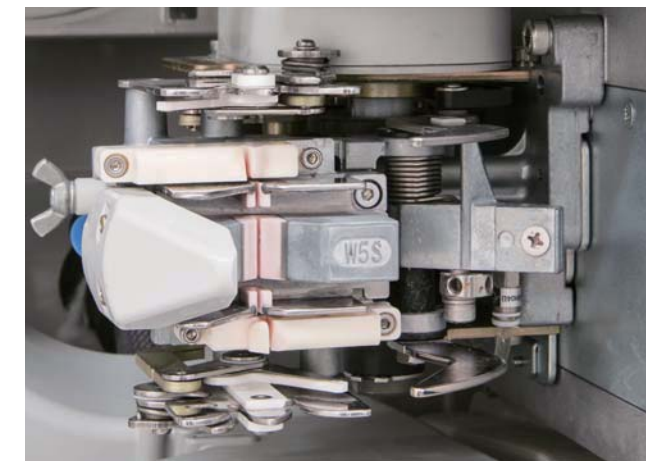

Air Splicer with 3 tier nozzle (Optional)

Worsted, Worsted blend, Wool, Synthetic (fiber length: 50mm ≤) etc.

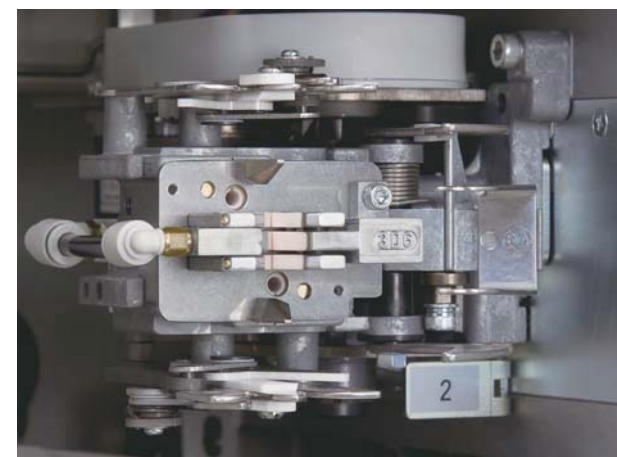

Hot Splicer (Optional)

Worsted, Worsted blend



Match your needs

Straight Magazine



Link Coner

Bobbin-tray



VCF

Cone to Cone



Rewind Magazine

Main specifications

Yarn	Magazine, Cone to Cone, Rewind Magazine Link Coner, Bobbin-tray, VCF	Cotton, staple fiber, worsted, woolen, synthetic, and blends Cotton, staple fiber, worsted, synthetic, and blends
Yarn Count	Ne3 to Ne142 (Nm5 to Nm240)	
Supply bobbin size	Magazine	a: Min. 15mm b: Min. 10mm D: Max. ø50mm (9can) ø75mm (6can) L: Max. 260mm (360mm)
	Link Coner	a: Min. 15mm b: Min. 10mm D: Max. ø57mm L: Max. 260mm Number of back winds: 3 to 5
	Bobbin-tray, VCF	a: Min. 15mm b: Min. 10mm D: Max. ø57mm L: Max. 260mm
Supply package size	Cone to Cone	D: Max. ø240mm L: Max. 182mm
	Rewind Magazine	D: Max. ø110mm L: Max. 182mm
Winding shape	0°~5°57'	
Winding traverse	148mm (5 3/4"), 153mm (6")	
Maximum package diameter	ø320mm/6" cone	
Machine orientation	Left-hand or Right-hand	
Number of spindles	Magazine	10-spindle system: Max. 60 12-spindle system: Max. 80 (12x5 + 10x2), 84, 96
	Link Coner	8-60spindle (Every 2 spindle excluding 14sp)
	Bobbin-tray, VCF	10-spindle system: Max. 60 12-spindle system: Max. 72 *10SP/12SP: 1 kind only
Yarn supply magazine	Cone to Cone	10-spindle system: Max. 60 12-spindle system: Max. 72
	Rewind Magazine	6-spindle system (double pitch): Max. 36
Amount of supply bobbin stock	Magazine	9-can magazine (6-can magazine)
Amount of supply package stock	Magazine	12-can magazine
Yarn joining method: Mach Splicer	Link Coner, Bobbin-tray, VCF	2 bobbins per spindle
Tensor	Cone to Cone (Model-II)	1 package per spindle
Blower	Cassette type splicer	
	PC Tensor	
	Magazine, Bobbin-tray, VCF, Cone to Cone	Individual blower: 15kW (option), 11kW, 7.5kW
Winding speed	Link Coner	Individual blower: 11kW, 7.5kW
	Rewind Magazine	Individual blower: 7.5kW
	DC Brushless motor direct drive	
Monitoring device	Maximum 2,200m/ min *Depending on the yarn type, supply bobbin and machine specification	
Yarn detector	DC Brushless motor direct drive	
Drum	VOSIII (Visual On-demand System)	
Yarn clearer	Lower yarn sensor	
	Steel drum	
	Capacity or Optical yarn clearer depending upon your request	



Match your needs

CBF (Continuous Bobbin Feeder)



First time in history of automation in winding, Muratec developed the bobbin transport system technology in 1983. This industry-changing innovation has enhanced the spinning-winding concept and has been adapted for material handling systems in a variety of ways. Various transport systems such as the bobbin tray type wherein the CBF and spinning doff box have been combined together and the link corner type wherein the CBF and spinning frame are connected have been put into practical use to promote automation at textile plants.



Plus Run System


By efficiently supplying full bobbins and buffering empty bobbins, the unit continues winding even while the spinning frame is doffing.

This maximizes the capacity of the winder. Well-balanced operation with the spinning frame is achieved using lesser number of drums on the winder.

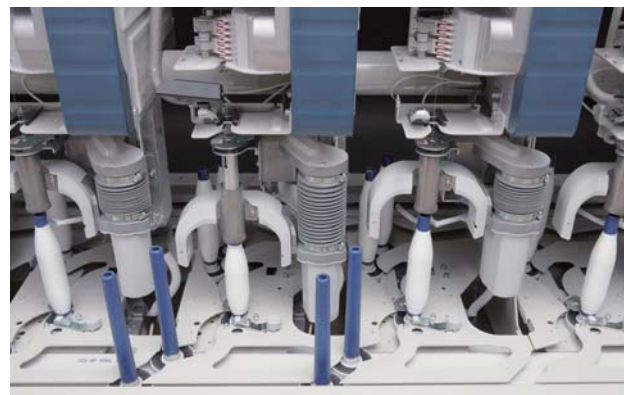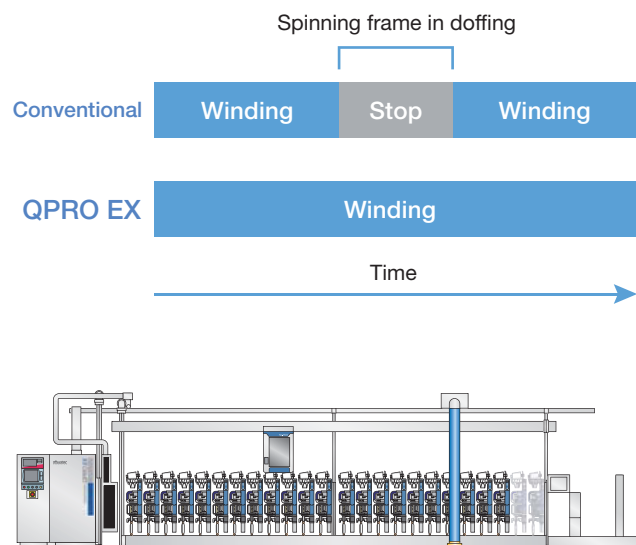

S-Feed Control

By circulating only the necessary quantity of full bobbins, the bobbin flow is optimized.

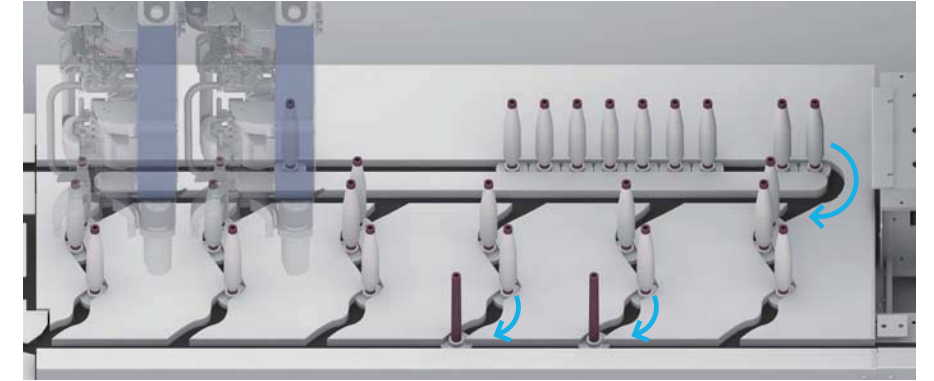


Side Suction (optional)

Thanks to side suction device, success ratio of picking up yarn end is improved even with bad shape bobbins.

The combination of side suction devices are as follows.


	1st line	2nd line
1 Kind (2 cop robos)	Without	Without
	Without	With
1 Kind (1 cop robo)	Without	
	With	
2 Kinds	Without	Without
	With	Without
	With	With

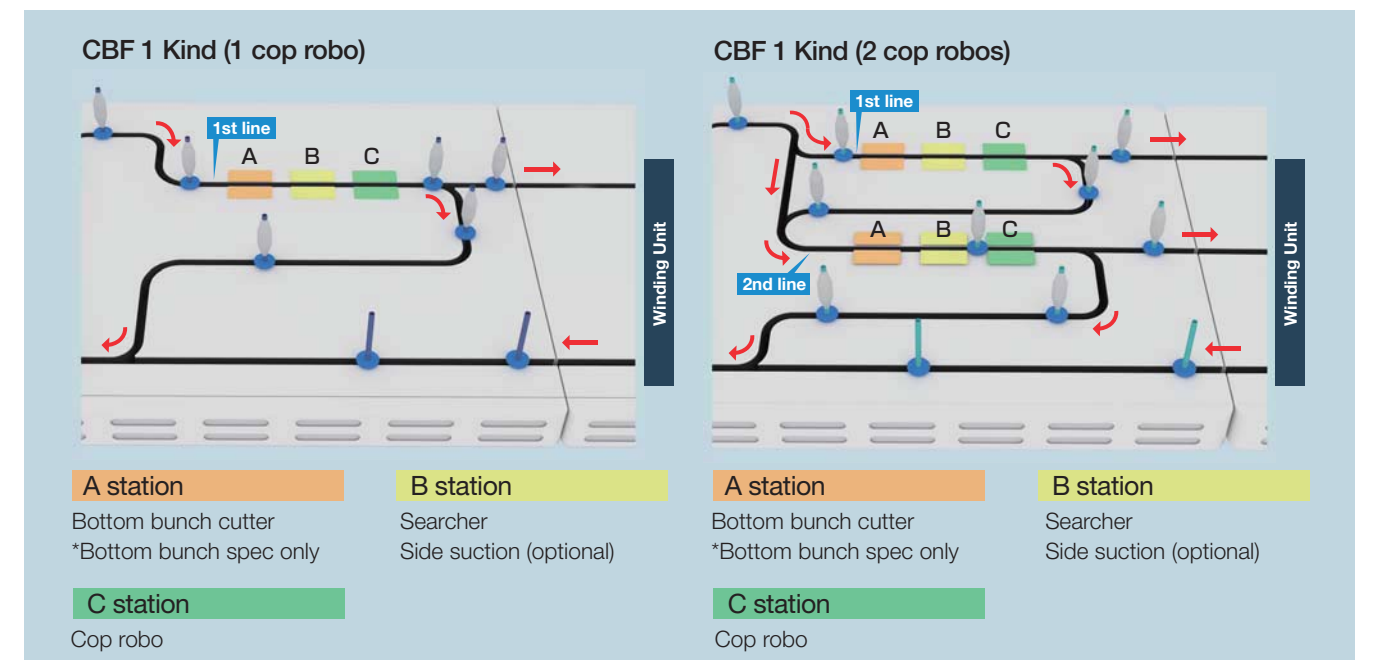

Match your needs

Link Coner

The spinning frame and automatic winder are directly connected via the tray-to-tray linking system conveyor. When the bobbins are doffed at the spinning frame, they are placed onto the tray and do not need to be replaced. This means that the bobbins are supplied to the winding unit without any special handling.

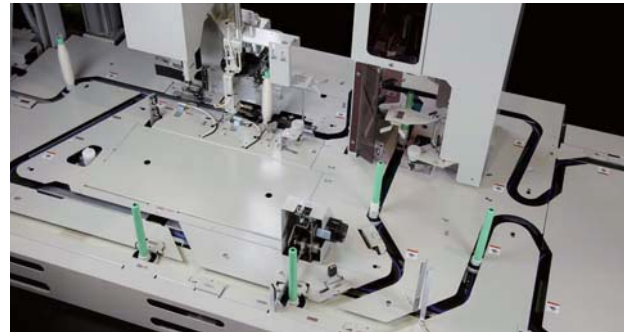

Easy operation/maintenance

Muratec pursued a simple compact design for easy machine operation and maintenance. In addition, since each spindle is independently driven, this machine can be maintained on a per spindle basis without stopping other spindles.

Reduction in total cost

The bobbins rewound by the winder are automatically sent to the spinning frame, minimizing risks such as damage and loss, and also leads to significant savings in plastic tubes. In addition, auxiliary devices and facilities such as bobbin boxes and carts can be drastically reduced.


Small footprint

Compared to installing a spinning frame and a winder separately, space to sort bobbins and store empty bobbins is not necessary, so floor space can be saved by 10% or more. A small footprint also leads to savings in air conditioning. In addition, since the production line of spinning and rewinding can be configured as a straight line, various types of work can be efficiently performed.

Labor saving


No manpower is required in the transportation between spinning and winding process, which contributes to labor saving.

Floor Space & Manpower comparison Simulation by Muratec in case of 29,184sp of Ring Spinning frame

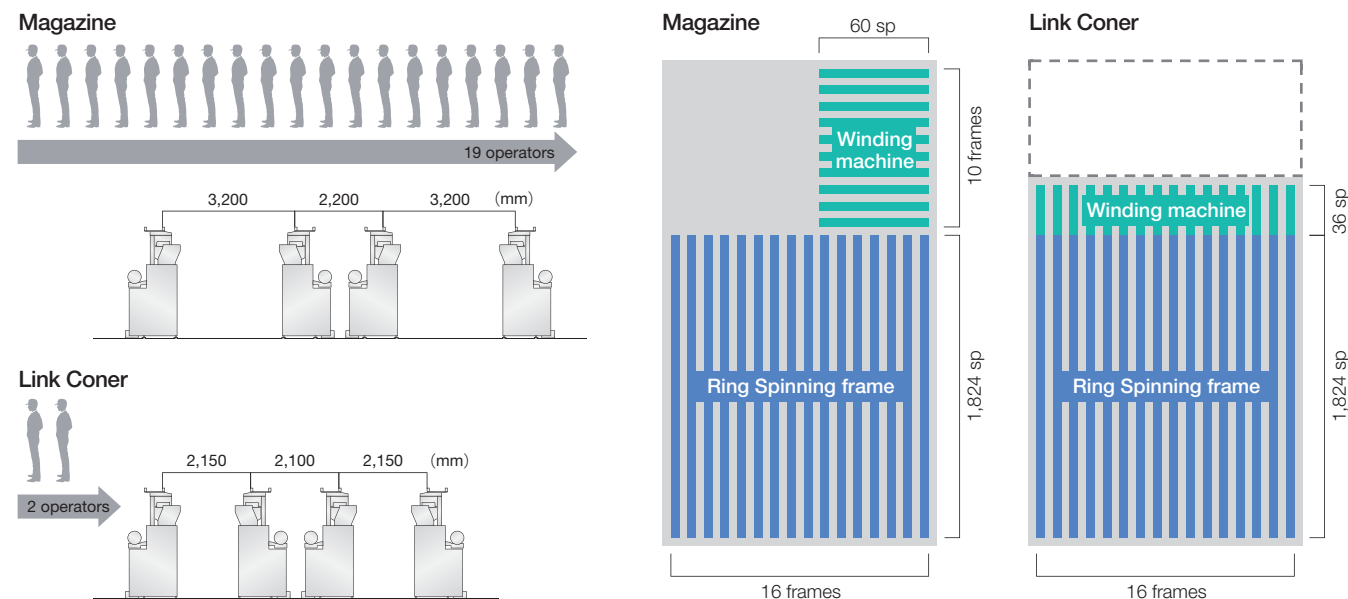


Auto Balance (optional)

Observes winding progress regularly until the next doffing of spinning frame. If winding progress is delayed due to unexpected troubles, the winding speed is automatically adjusted to recover the delay. Thanks to this function, the production can always be maintained. A similar automatic adjustment function can be used in Bobbin-tray, VCF, and Straight Magazine by setting the target shift production volume.

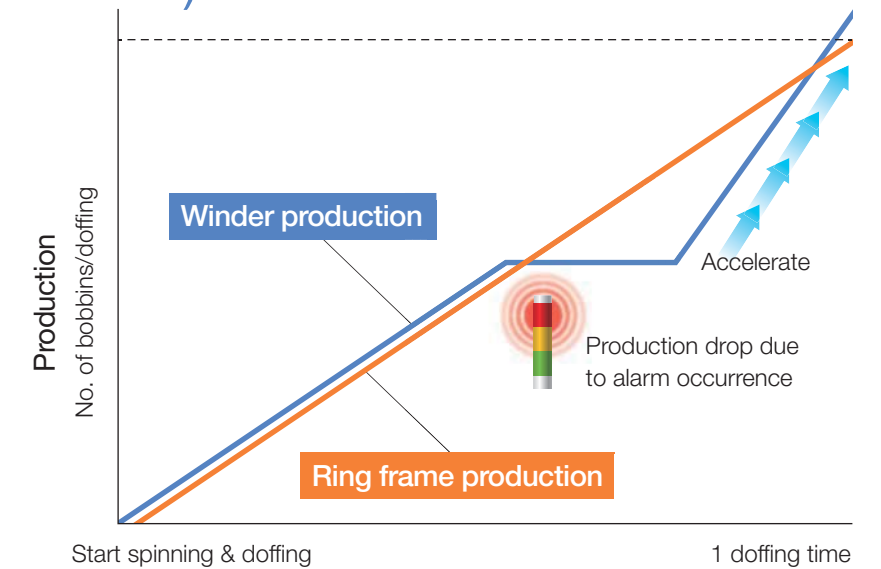

Winder waiting time comparison

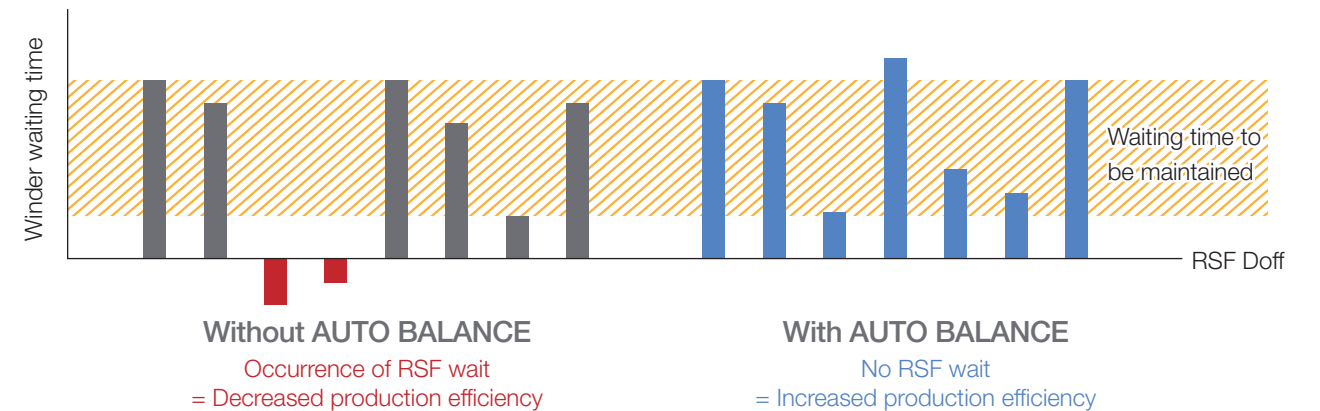

Additional Magazine (optional)

Rewinding solution on Link Coner for B-grade and bad shape bobbin.

Applicable models: Link Coner, Bobbin-tray (1 kind yarn supply)




Match your needs


CBF for Link Coner

Suitable CBF is selectable from 3 types according to factory conditions.

Standard

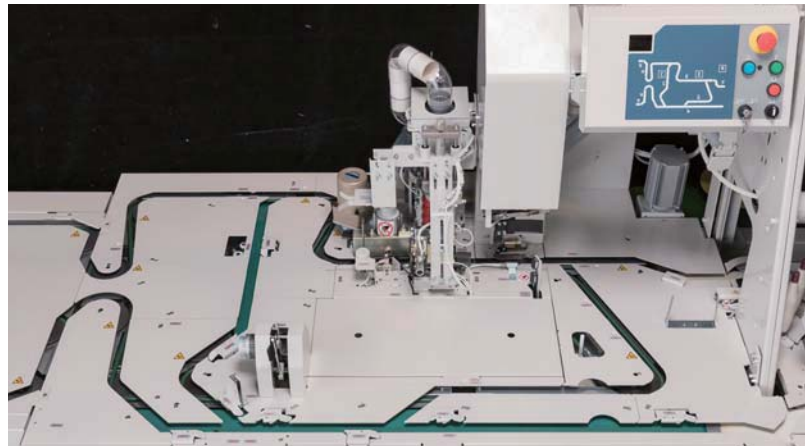


With Bobbin Stripper

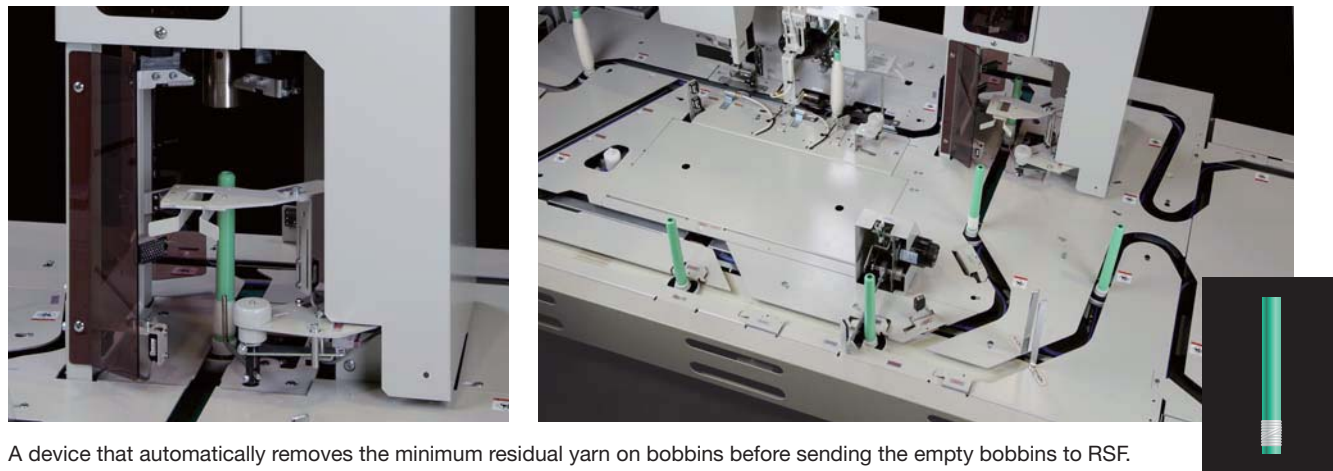

A device that automatically removes the minimum residual yarn on bobbins before sending the empty bobbins to RSF.

With Bobbin Exchanger

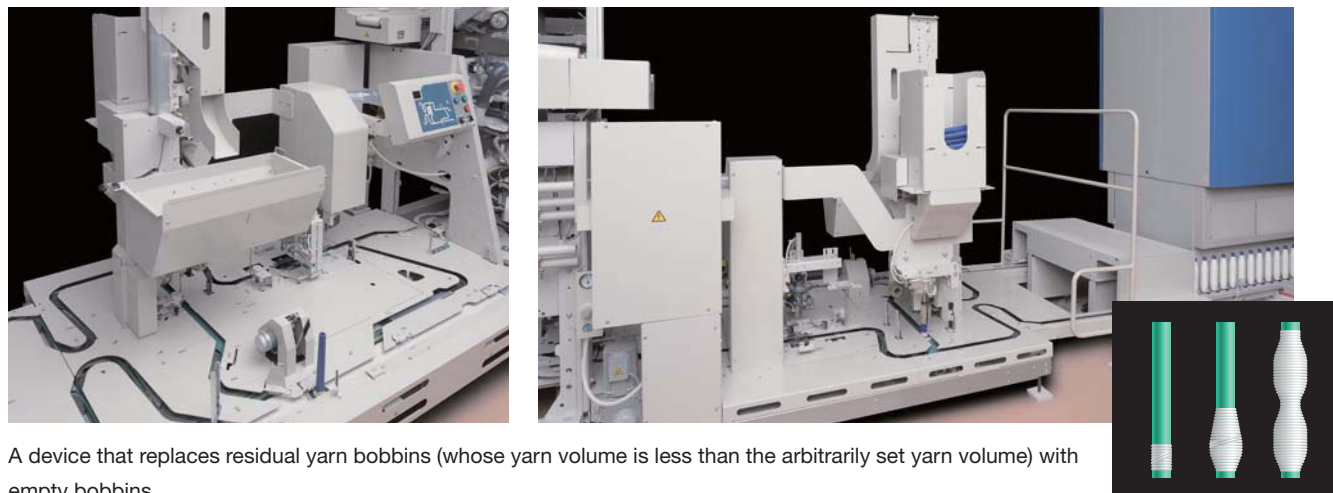

A device that replaces residual yarn bobbins (whose yarn volume is less than the arbitrarily set yarn volume) with empty bobbins.

Spin Inspector (optional)

Identify the bad spindle no. of RSF




Identify the spindle no. of RSF

Quality control screen

Ex.) Spindle No. B263: CV alarm occurred 3 times



Ejecting bad shape & textile alarm bobbins with sorting function

Bobbin Stripper

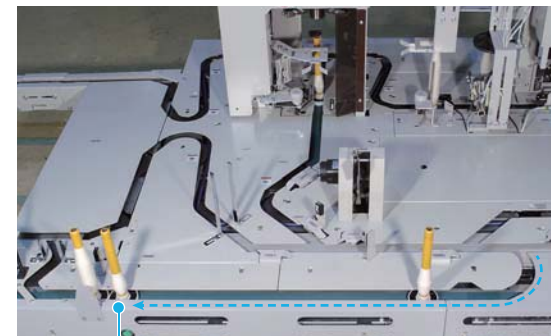

Textile alarm bobbin

Bobbin Exchanger

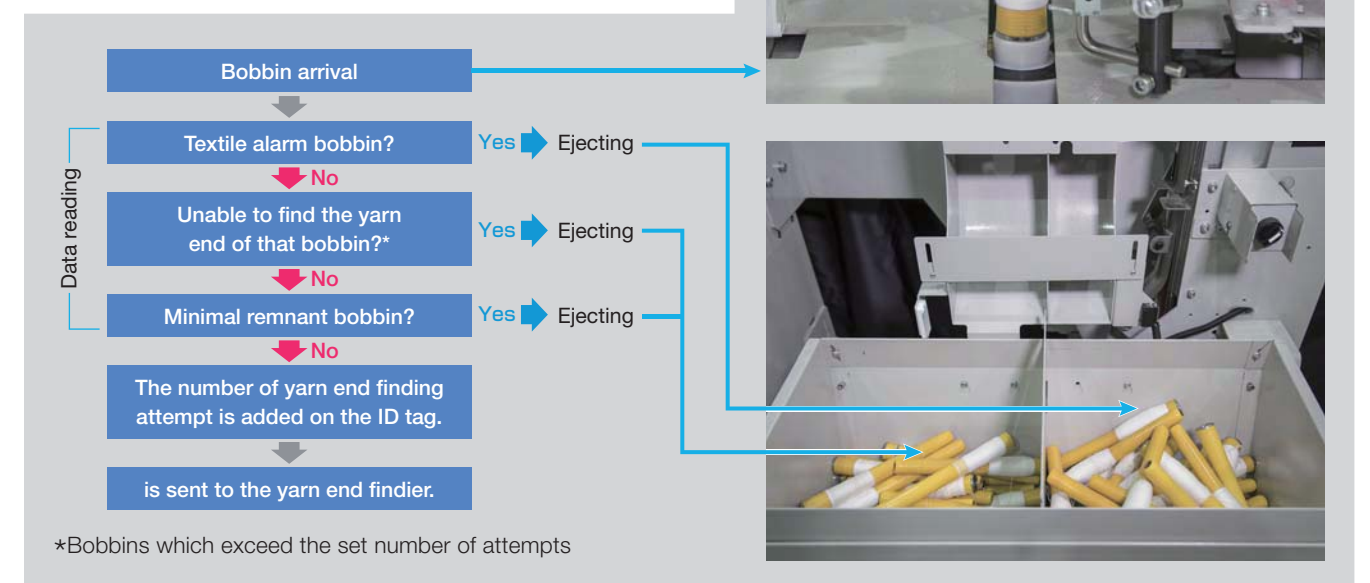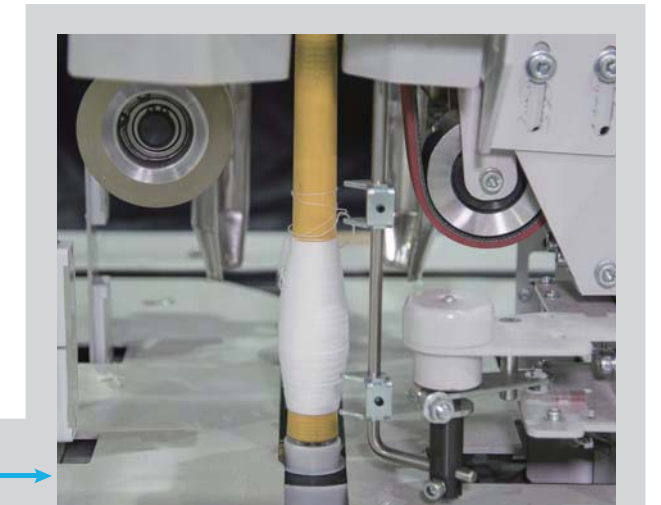

*Bobbins which exceed the set number of attempts


Match your needs

Bobbin-tray


Double feeding system enables the machine to work two kinds of yarn simultaneously which allows the machine with maximum flexibility with high efficiency. Two types of trays will be used for dividing the bobbins into two separate units by section with the mechanical system.



1 Kind (2 cop robos)

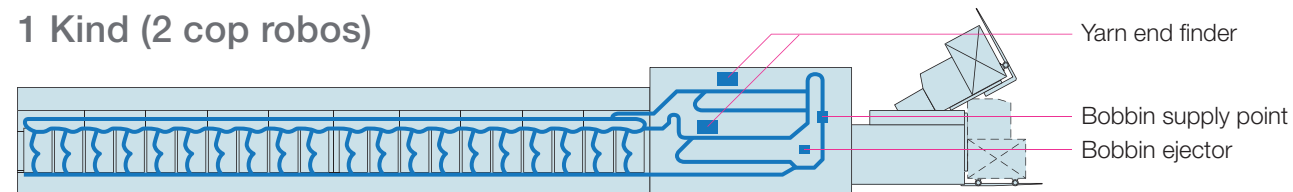


2 Kind (2 cop robos)

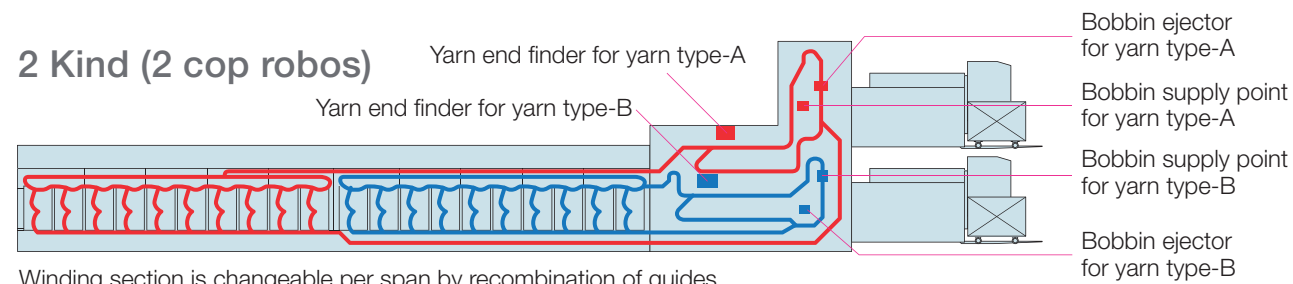

Winding section is changeable per span by recombination of guides.


Dual Chute System (optional)

The number of supplied bobbins increases to 50 or more per minute. This allows for coarse yarn count on the 72-spindle machine.

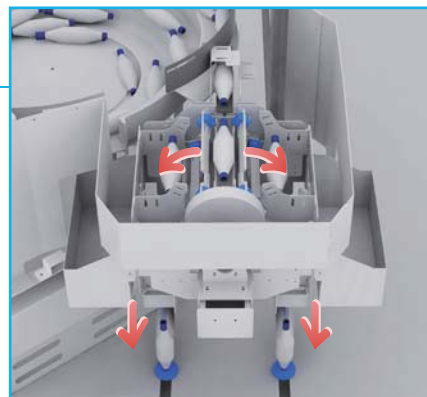

Length : Max. 230mm Diameter : Max. Φ 47

Recommended size of doffing box

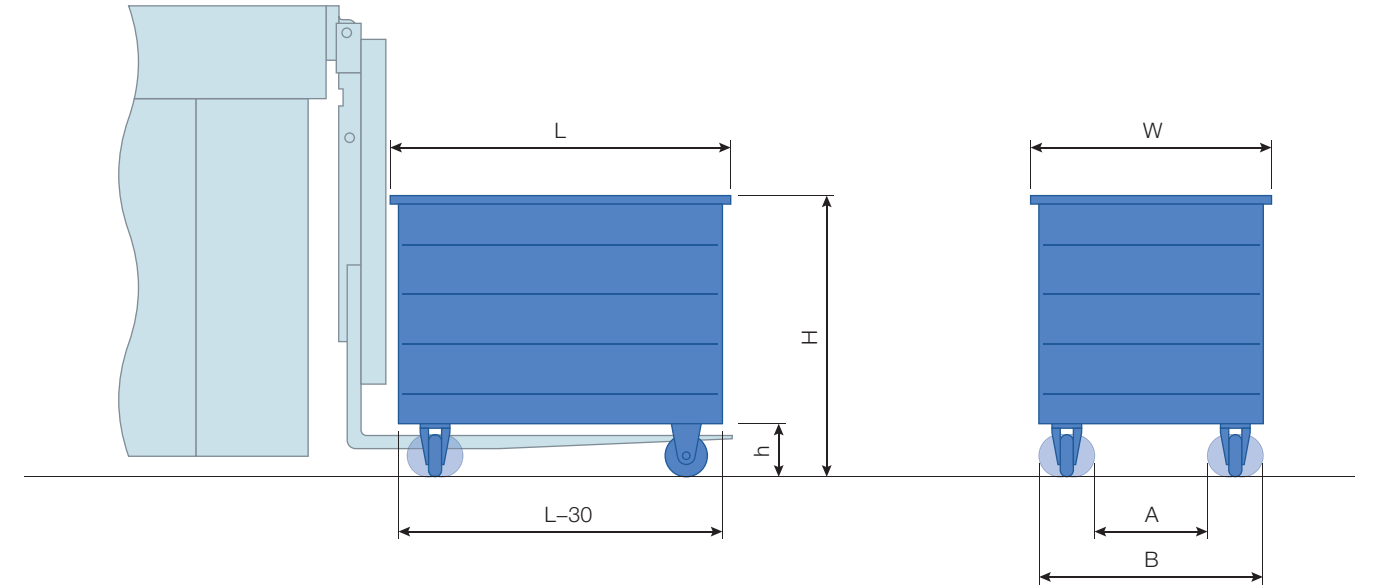

Bobbin	L	W	H	h	A	B
500 pcs	800	680	1000	130~200	500~675	Max. 570
1000 pcs	1000	900	1000	130~200		

Bobbin ϕ 45 x L250



Match your needs


VCF

Two kinds yarn supply

Just one machine can wind two different yarn kind / count bobbin.

Labor saving

Saves max. 75% labor in comparison to magazine type.

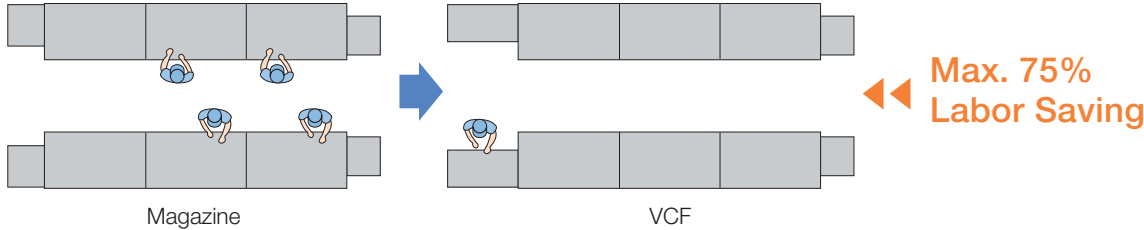

Bunch remover

Sucks out the bunch of each bobbin with suction air.



Empty Bobbin Collection System

Standard type



Sorting Type (2types, optional)

Square Box Type (1 or 2 Box selectable)

Fan Box Type

Ejects empty bobbins keeping same direction to help easy operation.

Sorting image (Fan Box Type)

Residual yarn checker (Dual Brush Type)

VCF Advance (optional)

Larger supply bobbin box


	Standard	Advance
No. of reserve bobbins	270pcs	540pcs

*The number of reserve bobbins depends on the bobbin length.



Automatic replacement of empty bobbin box

An additional spare box for empty bobbins is provided. If the one box became full, it is automatically changed to the spare box.

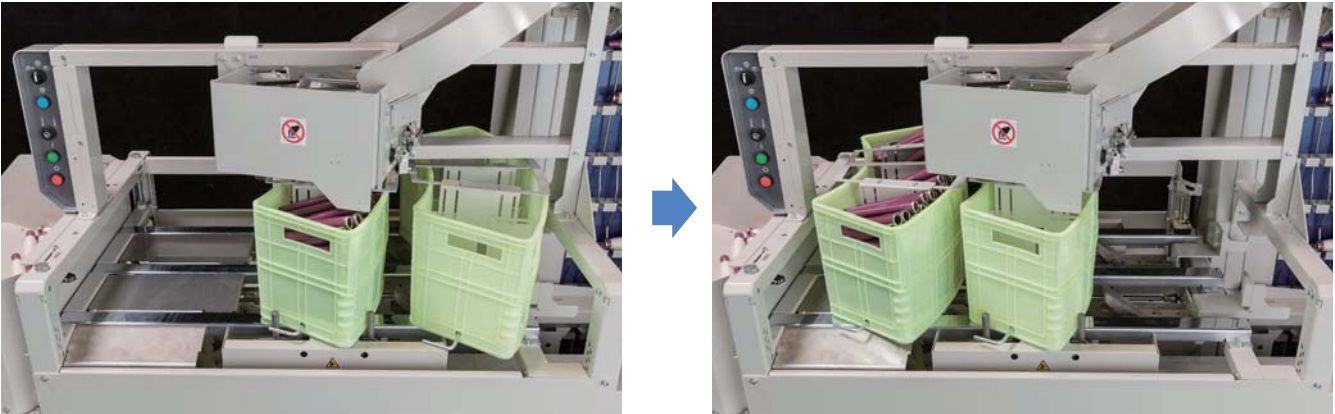


Match your needs

Cone to Cone



Model- I



Inner layer sensor
Outer layer sensor

Outer layer sensor

At the package outer layer section where yarn breakage can easily occur, low-speed winding is performed, and upon detection of the sensor, the winding speed is increased to efficiently reduce yarn breakage. (set diameter: 100 – 200mm).


Inner layer sensor

Deceleration function


Upon detection of an inner layer, winding stops automatically (Model I) or the winding speed is decreased (Model I & II).

Inner layer removal function


After winding is complete, the inner layer is removed by sucking with the suction mouth (Model II).

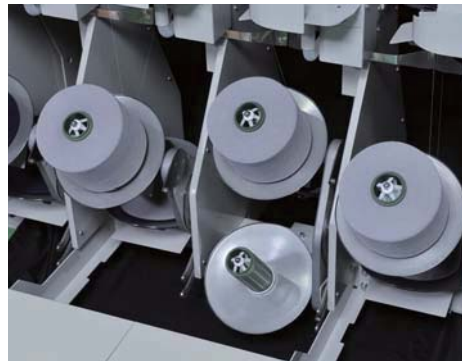

Model- II



Outer layer sensor
Inner layer sensor

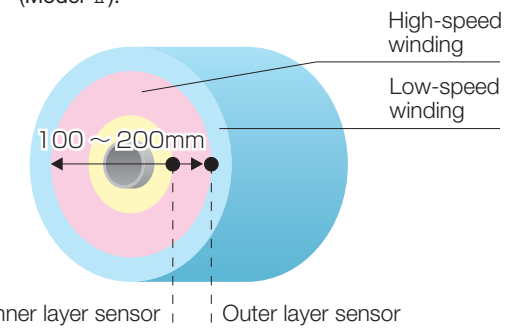

Rewind Magazine




Optimal device list

		Accessory equipment					Optional equipment			
		Straight Magazine	Link Coner	Bobbin-tray	VCF	VCF Advance	Cone to Cone Model-I	Cone to Cone Model-II	Rewind Magazine	
UNIT	High efficiency drum motor									
	Pac21 winding system									
	Ceramic cutter									
	Kink Preventing system (Hard waste reducer)									
	Sloughing catcher									
	Suction shutter									
	Vibration sensor									
	PC module	PC Tensor								
		PC Bal-Con								
		PC Sensor								
	Auto Bobbin-Centering Function									
	Splicer	S.A.S. (Stretch Air Splicer)								
		Water/Air Hybrid splicer								
		Water splicer with beater								
		Air splicer with 3-tier nozzle								
Hot splicer										
Waxing device										
Upper yarn sensor										
PLC21 (Perfect Length Counter 21)										
Dust collector										
Traverse sensor										
V-gate tensor										
Inner layer sensor										
Outer layer sensor										
Blower with Static pressure control(individual blower)										
Blow cleaner										
Package conveyor										
Package shutter										
Plus Run system										
MC	S-Feed control									
	AD (Automatic doffer)									
	Empty bobbin sorting table (Only with Line conveyor)									
	Mule bobbin conveyor									
	Split conveyor									
	Wide line conveyor									
	CBF	Bobbin stripper								
		Bobbin exchanger (Ejector + Chuter)								
		Bobbin chuter								
		2 cop robos with 1 kind yarn supply								
2 cop robos with 2 kind yarn supply										
Dual chute system (Length : Max.230mm Diameter : Max. ø47)										
Square box type with sorting function										
Fan box type with sorting function										
Residual Yarn Checker (Double Brush Type)					*					
Bunch remover										
Beater										
Bottom searcher										
Rotary cutter										
Side suction										
Auto balance										
Additional Magazine										
Others	Spin inspector									
	Underground linking system									
	Tray selector									

* Fan box type is equipped with residual yarn checker as standard spec


Dimensions of Machine

Straight Magazine

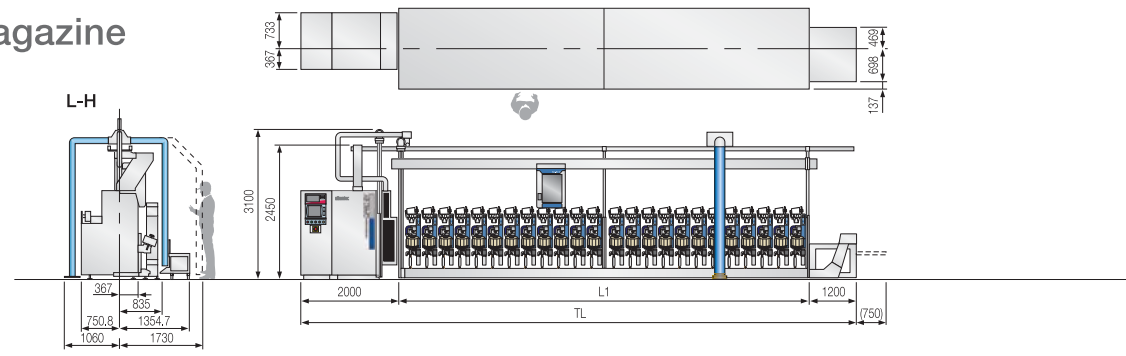


	10SP	12SP	20SP	24SP	30SP	36SP	40SP	48SP	50SP	60SP(5-span)	60SP(6-span)	72SP	80SP	84SP	96SP
TL	6470	7110	9740	11020	13010	14930	16280	18840	19550	22750	22820	26660	29290	30570	34480
L1	3270	3910	6540	7820	9810	11730	13080	15640	16350	19550	19620	23460	26090	27370	31280

Cone to Cone

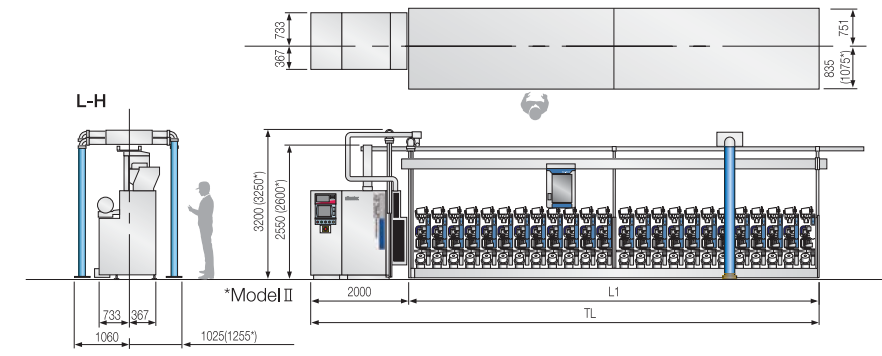

	10SP	12SP	20SP	24SP	30SP	36SP	40SP	48SP	50SP	60SP(5-span)	60SP(6-span)	72SP
TL	5270	5910	8540	9820	11810	13730	15080	17640	18350	21550	21620	25460
L1	3270	3910	6540	7820	9810	11730	13080	15640	16350	19550	19620	23460


VCF VCF Advance

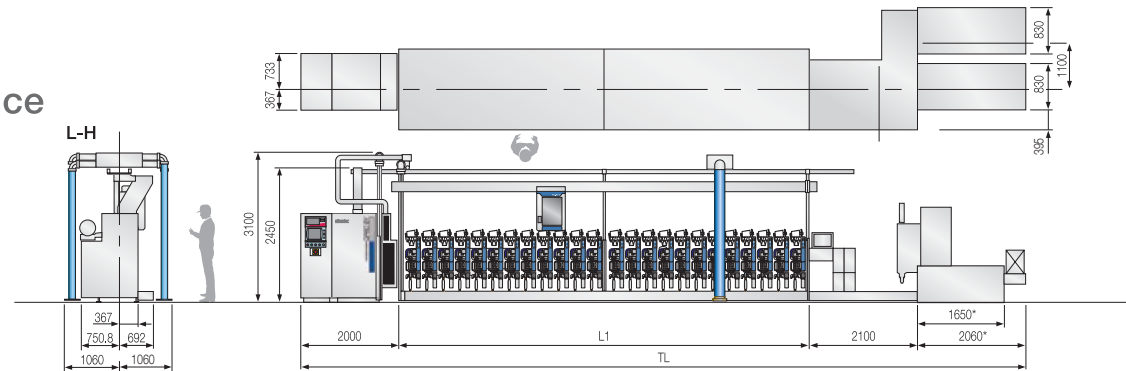

	10SP	12SP	20SP	24SP	30SP	36SP	40SP	48SP	50SP	60SP(5-span)	60SP(6-span)	72SP
TL*	9430	10070	12700	13980	15970	17890	19240	21800	22510	25710	25780	29620
L1	3270	3910	6540	7820	9810	11730	13080	15640	16350	19550	19620	23460


* VCF ADVANCE : +500
•10SP/12SP : 1 kind only

Rewind Magazine

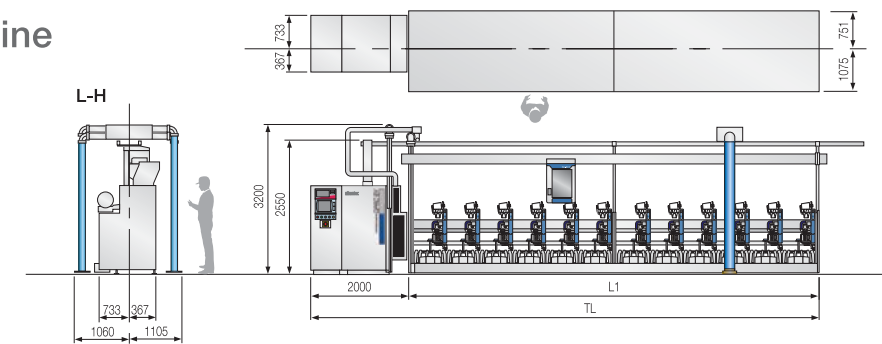

	6SP	12SP	18SP	24SP	30SP	36SP
TL	5910	9820	13730	17640	21550	25460
L1	3910	7820	11730	15640	19550	23460


Bobbin-tray

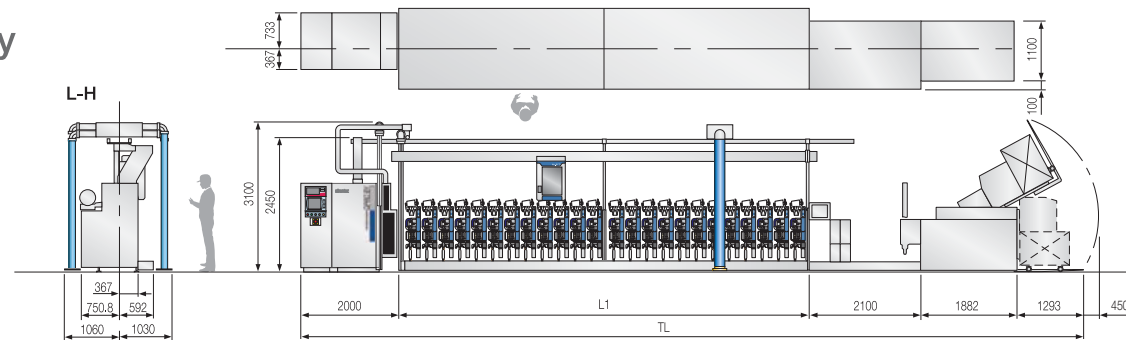

	10SP	12SP	20SP	24SP	30SP	36SP	40SP	48SP	50SP	60SP(5-span)	60SP(6-span)	72SP
TL	10545	11185	13815	15095	17085	19005	20355	22915	23625	26825	26895	30735
L1	3270	3910	6540	7820	9810	11730	13080	15640	16350	19550	19620	23460


•10SP/12SP : 1 kind only

Straight Magazine / Cone to Cone Rewind Magazine

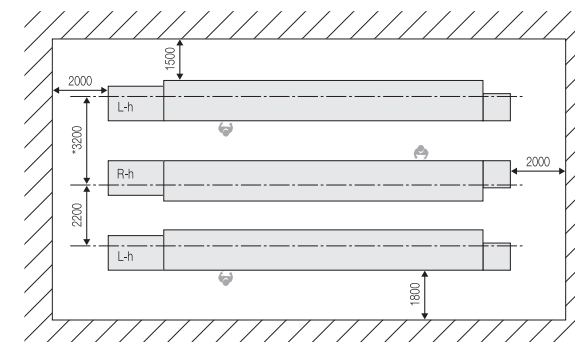

* With front suction type of blow cleaner (optional)


Link Coner

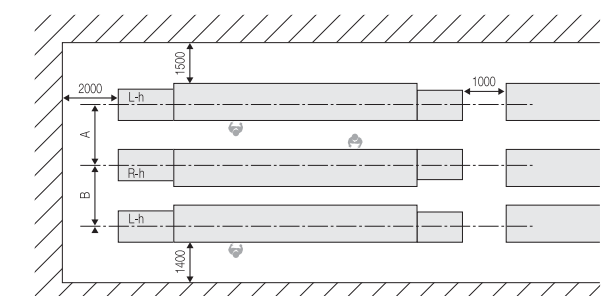

Dust Collector	A		B	
	Without	2150	2000	
With	2150	2200		

•With package shutter (optional) : B=2200

Link Coner

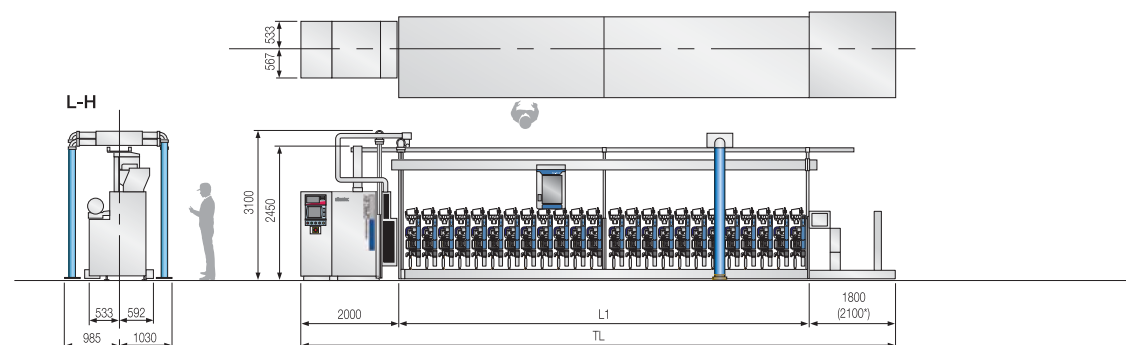


	18SP	20SP	22SP	24SP	26SP	28SP	30SP	32SP	34SP	36SP	38SP	40SP	48SP	60SP
TL	9700	10340	10980	11620	12330	12970	13610	14250	14890	15530	16240	16880	19440	23350
L1	5900	6540	7180	7820	8530	9170	9810	10450	11090	11730	12440	13080	15640	19550


* With 2 cop robots : +300mm in a total length

Bobbin-tray

1 kind

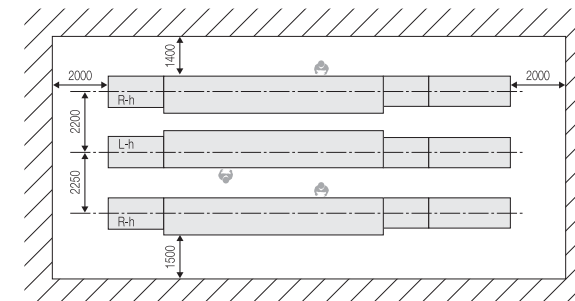



2 kinds

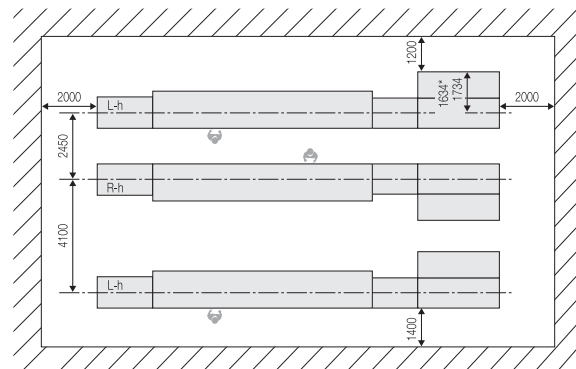

* VCF


Dear Valued yarn buyers

Don't you have problems of many yarn breaks like following picutres?
These problems are coming from 'Ribbons' on the package.

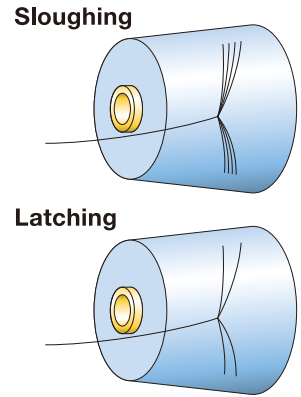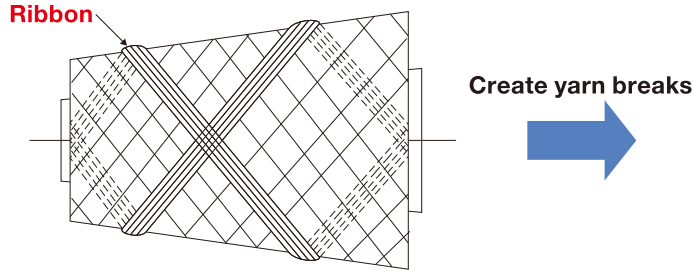

In order to solve these problems, Muratec has developed "Pac 21 winding system" which is combination of special machine program & uniquely designed drum. Thanks to this technology, the package which is wound by "Pac21 winding system" is always able to avoid patterning point and shows higher unwinding performance as shown in following data.

Pac21 winding system

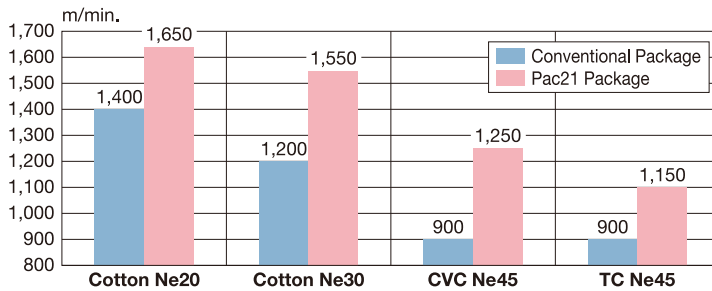

Note : 1) This data is just for your reference.
2) This is unwinding data which is wound from package dia. 260mm to empty with 5' 57 tube.

Quality Ring

If the package is wound by Pac21 Winding system, the surface of package shows small steps as per the following picture which is namely "Quality Ring" because No. of winding has been contoured at patterning point. It is one of the certification of good quality package which is suitable for high speed unwinding as shown above.






Please check unwinding performance between your normal package and the one with Quality ring.



Mechanical explanation

Muratec's Multi-grooved drum has 3 functions by switching the guide position.

- 1) as 2 wind drum for coarse count.
- 2) as 2.5 wind drum for middle & fine count.
- 3) as Multi-drum for higher-speed unwinding performance.

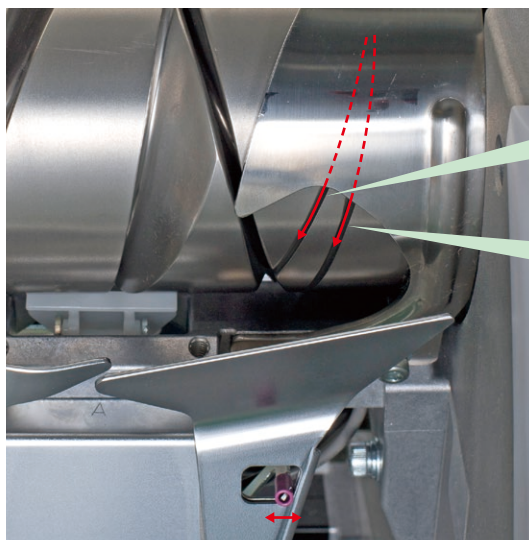

as Multi-Drum on 2.5W base

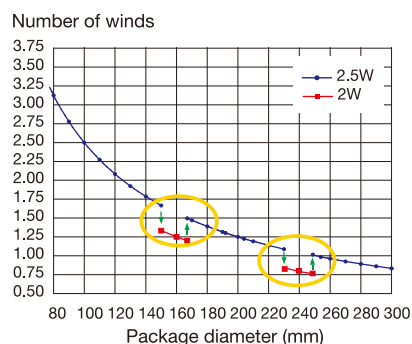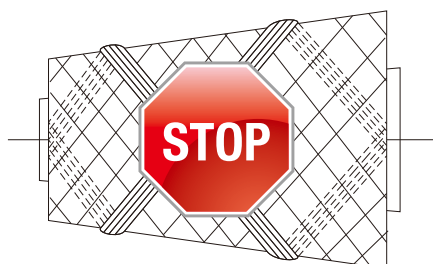

* Very less chance to have yarn breaks due to sloughing & latching thanks to Multi-Drum.

Rough standard of available yarn count

Drum type	Yarn Count (Ne)	Winding Shape			
		Regular Package		Dye Package	
		Cone	Parallel	Parallel	Cone
Pac-A	2.5W	○	NA	NA	NA
	2W	○	○	※	※
Pac-B	2W	3°30' ~ 4°20'	○	※	※
	1.5W	3°30' ~ 4°20'	○	※	※
Pac-D	2.5W	4°20' ~ 5°57'	NA	NA	NA
2W		※	○	○	※

○ : Available ※ : Condition Apply NA : No Applicable